

Please type a plus sign (+) inside this box ☒ Approved for use through 09/30/00. OMB 0651-0032 PTO/SB/05 (12/97)
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 CFR 1.53(b))	Attorney Docket No.	TI-31698
	First Named Inventor or Application Identifier	John G. McDonough
	Title	SYSTEM AND METHOD FOR SELECTING SAMPLE STREAMS IN DIRECT SEQUENCE SPREAD SPECTRUM COMMUNICATIONS
	Express Mail Label No.	EL213565179US

APPLICATION ELEMENTS See MPEP Chapter 600 concerning utility patent application contents	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
--	--

1. <input checked="" type="checkbox"/> Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original, and a duplicate for fee processing)	6. <input type="checkbox"/> Microfiche Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Specification (preferred arrangement set forth below) - Descriptive title of the Invention - Cross References to Related Applications - Statement Regarding Fed sponsored R&D - Reference to Microfiche Appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure [Total Pages] 31	7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identical of above copies
3. <input checked="" type="checkbox"/> Drawing(s) (35 USC d113) [Total Sheets] 10	ACCOMPANYING APPLICATION PARTS 8. <input type="checkbox"/> Assignment Papers (cover sheet & Documents(s)) 9. <input type="checkbox"/> 37 CFR §3.73(b) Statement (when there is an assignee) <input checked="" type="checkbox"/> Power of Attorney 10. <input type="checkbox"/> English Translation Document (if applicable) 11. <input checked="" type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input checked="" type="checkbox"/> Copies of IDS Citations 12. <input type="checkbox"/> Preliminary Amendment 13. <input checked="" type="checkbox"/> 2 Return Receipt Postcards (MPEP 503) (Should be specifically itemized) 14. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application Status still proper and desired (PTO/SB/09-12) 15. <input type="checkbox"/> Certified Copy of Priority Document(s) if foreign priority is claimed 16. <input checked="" type="checkbox"/> Other: Check # 456559 for \$952.00
4. Oath or Declaration [Total Pages] 1 a. <input checked="" type="checkbox"/> Newly Executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 CFR §1.63(d)) (for continuation/divisional with Box 17 completed) [Note Box 5 below] i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR §1.63(d)(2) and 1.33(b).	
5. <input type="checkbox"/> Incorporation By Reference (useable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	
17. If a CONTINUING APPLICATION , check appropriate box and supply the requisite information below and in a preliminary amendment: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application No: / Prior application information: Examiner Group / Art Unit:	

18. CORRESPONDENCE ADDRESS	
<input type="checkbox"/> Customer Number or Bar Code Label	or <input checked="" type="checkbox"/> Correspondence address below
(Insert Customer No. or Attach bar code label here)	

NAME	Ronald O. Neerings Texas Instruments Incorporated		
ADDRESS	Mail Station 3999 P. O. Box 655474		
CITY	Dallas	STATE	TX
COUNTRY	U.S.A.	TELEPHONE	(972) 917-
		ZIP CODE	75265
		FAX	(972) 917-4418

Name (Print/Type)	Terrance A. Meador	Registration No. (Attorney/Agent)	30,298
Signature	Terrance A. Meador	Date	6 October 2000

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

FEE TRANSMITTAL

Patent fees are subject to annual revision on October 1.
These are the fees effective October 1, 1997
Small Entity payments must be supported by a small entity statement,
otherwise large entity fees must be paid. See Forms PTO/SB/09-12.

Complete If Known

Application Number	To be assigned
Filing Date	Herewith
First Named Inventor	John G. McDonough
Examiner Name	Unknown
Group / Art Unit	Unknown
Attorney Docket No.	TI-31698/DOT1200

TOTAL AMOUNT OF PAYMENT (\$ 952.00)

METHOD OF PAYMENT

- 1.
- ☒
- The Commissioner is hereby authorized to charge to the following Deposit Account,

Deposit Account Number

07-1895

Deposit Account Name

Gray Cary Ware & Freidenrich

- ☒
- Charge any additional fee required or credit any overpayment

- ☐
- Charge all indicated fees and any additional fee required or credit any overpayment

- 2.
- ☒
- Payment Enclosed:**

☒ Check ☐ Money Order ☐ Other**FEE CALCULATION****1. BASIC FILING FEE**

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description	Fee Paid
101	790	201	395	Utility filing fee	\$710
106	330	206	165	Design filing fee	\$
107	540	207	270	Plant filing fee	\$
108	790	208	395	Reissue filing fee	\$
114	150	214	75	Provisional filing fee	\$
SUBTOTAL (1)					(\$710)

2. EXTRA CLAIM FEES

	Extra Claims	Fee from below	Fee Paid
Total Claims 29 -20**= 9 x 18 = 162			
Independent Claims 4 -3**= 1 x 80 = 80			
Multiple Dependent 0 = 0			

**or number previously paid, if greater; For Reissue, see below

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description
103	22	203	11	Claims in excess of 20
102	82	202	41	Independent Claims in excess of 3
104	270	204	135	Multiple dependent claims in excess of 3
109	82	209	41	**Reissue independent claims over original patent
110	22	210	11	**Reissue claims in excess of 20 and over original patent

SUBTOTAL (2) (\$242)

FEE CALCULATION (continued)**3. ADDITIONAL FEES**

Large Fee Code	Entity Fee (\$)	Small Fee Code	Entity Fee (\$)	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet.	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for reply within first month	
116	400	216	200	Extension of time within second month	
117	950	217	475	Extension of time within third month	
118	1,510	218	755	Extension of time within fourth month	
128	2,060	228	1,030	Extension of time within fifth month	
119	310	219	155	Notice of Appeal	
120	310	220	155	Filing a brief in support of an appeal	
121	270	221	135	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,320	241	660	Petition to revive - unintentional	
142	1,320	242	660	Utility issue fee (or reissue)	
143	450	243	225	Design issue fee	
144	670	244	335	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Disclosure Stmt.	
581	40	581	40	Recording each patent assignment per property (time number of properties)	
146	790	246	395	Filing a submission after final rejection (37 CFR 1.129(a))	
149	790	249	395	For each additional invention to be	

Other fee (specify)

Other fee (specify)

*Reduced by Basic Filing Fee Paid

SUBTOTAL (3)

SUBMITTED BY

Typed or Printed Name

TERRANCE A. MEADOR

Signature

Terrance A. Meador 6 October 2000

Date

Complete (if applicable)

Reg. Number

30,298

Deposit Account User ID

SYSTEM AND METHOD FOR SELECTING SAMPLE STREAMS IN DIRECT SEQUENCE SPREAD SPECTRUM COMMUNICATIONS

5 **1. Background of the Invention**

The present invention relates generally to the field of direct sequence spread spectrum (DSSS) communications and, more particularly, to the selection of sample streams for despreading and demodulation in a code division multiple access (CDMA) RAKE receiver.

10 **2. Description of Related Art**

In spread spectrum communications, such as in CDMA systems, pseudorandom noise (PN) sequences are used to generate spread spectrum signals by increasing the bandwidth (i.e., spreading) of a baseband signal. A forward link waveform transmitted by the base station may be comprised of a pilot waveform and a data waveform. Both of the waveforms are received with the same relative phase and amplitude distortions introduced by the channel. The pilot waveform is an unmodulated PN sequence which aids in the demodulation process, as is well-known in the art as "pilot-aided demodulation." Conventional pilot-aided demodulation methods typically include the steps of (i) demodulating the pilot waveform, (ii) estimating the relative phase and amplitude of the pilot waveform, (iii) correcting the phase of the data waveform using the estimated phase of the pilot waveform, and (iv) adjusting the weight of data symbols used in maximal ratio combining in a RAKE receiver based on the estimated amplitude of the pilot waveform. Steps (iii) and (iv) above are performed as a "dot product" as is known in

the art. Conventionally, steps (i) through (iv) are performed in hardware. In some conventional methods, a controller having a central processing unit (CPU) and/or a digital signal processor (DSP) may perform some of the above-described steps.

5 Fig. 1 illustrates a conventional IS-95A or TIA/EIA-95-B forward link base station transmitter 10 (prior art). A pilot channel 12 is generated that has no data. That is, the data is predetermined to be all "0" bits. The pilot channel is modulated, or covered with a Walsh code from Walsh code generator 14 at 1.2288 Mcps (megachips per second). 64
10 orthogonal Walsh codes, each of 64 bits, are used in the IS-95A and TIA/EIA-95-B systems. Walsh code H_0 is used to modulate the pilot channel.

Also depicted is a traffic or paging channel, which shall be referred to herein as an information channel. Data is input at one of a
15 plurality of data rates from 9.6 kbps (kilobits per second) to 1.2 kbps. The data is encoded at encoder 16, at one bit per two code symbols, so that the output of the encoder 16 varies from 19.2 ksps (kilosymbols per second) to 2.4 ksps. Symbol repetition device 18 repeats the code symbols from 1 to 8
20 times to create a 19.2 ksps signal. Alternately stated, either 1, 2, 4, or 8 modulation symbols are created per code symbol. Then, the information channel is scrambled with a long code at the same 19.2 ksps rate. Other rates are described in the IS-2000 standard. The information channel is covered with a different Walsh code from that used to cover the pilot channel, code H_7 for example.

After being modulated with Walsh codes, each channel is spread with a common short code, or PN sequence. Each channel is split into I and Q channels, and spread with I and Q channel PN sequences. A 90 degree phase shift is introduced by multiplying the I channels with a sin function, while the Q channels are being multiplied with a corresponding cosine function. Then, the I and Q channels are summed into a QPSK channel. In the IS-95A and TIA/EIA-95-B standards, the same baseband symbols are assigned to both the I and Q channels. The combination of all the QPSK channels, including pilot, synchronization, paging, and traffic channels can be considered a composite waveform. This composite waveform is then up-converted in frequency (not shown) and transmitted.

Fig. 2 is a conventional IS-95A or TIA/EIA-95-B CDMA receiver (prior art). At the mobile station receiver 50 the transmitted signals are accepted as analog information, and converted into a digital I and Q sample stream at A/D 52. Conventionally, a multi-finger RAKE is used to variably delay and amplify multipath delays in the sample stream, so that degradation due to fading can be minimized. Three demodulating fingers, demodulating finger 1 (54), demodulating finger 2 (56), and demodulating finger 3 (58) all receive the same I and Q sample stream, which has been represented as a single line for simplicity. Each demodulating finger is assigned one of the sample stream multipath delays. PN codes and Walsh codes are generated with delays consistent with the multipath delays of the sample stream to be demodulated. The

sample stream from the multipaths is coherently combined in combiner 60 based on a maximal ratio combining (MRC) principle.

The IS-2000 standards propose, and future uses will include multiple information channels with a variety of symbol rates. A variety of symbol accumulation periods will be required in the process of demodulating these information channels. In IS-95A and TIA/EIA-95-B standard communications, a symbol is conventionally spread with 64 PN chips at the transmitter. At the receiver, the symbol is recovered by despreading, uncovering, and accumulating the symbol over a period of 64 PN chips. The accumulated symbol is called a soft symbol. Conventionally, the soft symbol is corrected with respect to phase and weighted with respect to amplitude after accumulation, using the pilot waveform as a phase and amplitude reference.

The receiver 50 may also receive a sample stream including signals from more than one base station. The base stations are precisely timed and synchronized using offsets of the PN spreading code. That is, the sample stream received from two different base stations has delays that are typically much larger than multipath delays. The receiver 50 has diversity characteristics which permit it to demodulate the sample stream from multiple base stations, for the purposes of a handoff for example.

In some conventional CDMA RAKE receivers, the outputs of multiple demodulating fingers are "hardwired" to combine the common information channels in a sample stream. The decision and data transfer operations of the individual finger channels are predetermined. Hardwiring reduces flexibility, as the finger channels of the demodulating

fingers must always be combined with the same partner finger channels. Thus, the number of information channels, the information channel order, and the information channels that can be combined across demodulating fingers are necessarily constricted when the finger channel outputs are
5 connected in a hardwired arrangement. Hardwiring does not permit partner finger channels to be used with different combiner channels. A conventional receiver with a fixed number of finger channels in each demodulating finger can only demodulate such a fixed number of IS-2000 standard information channels.

10 Alternately, the soft symbols output by the demodulating finger can be buffered and transferred, via a data bus, to a CPU or DSP for combining. This software combining approach provides flexibility, as potentially the finger channels can be combined in any variation. However, the CPU or DSP may not have enough bandwidth to accomodate
15 the speed of the hardware combining solutions, nor will such solutions prove power efficient.

It would be advantageous if a CDMA receiver could be designed to maximize flexibility, permitting demodulating fingers to be used to demodulate any sample stream, and the finger channels of the
20 demodulating finger to be used to demodulate any information channel in a sample stream.

It would be advantageous if a CDMA receiver could be designed to minimize the number of demodulating fingers required to demodulate information channels in many different sample streams. To
25 that end, it would be desirable if any demodulating finger could be

selected to demodulate information channels in any of the sample streams.

It would be advantageous if a CDMA receiver could be used to demodulate a plurality of sample streams, from a plurality of carrier signals. To that end, it would be useful if the demodulating fingers were able to independently demodulate sample streams received on different antennae.

SUMMARY OF THE INVENTION

Accordingly, a DSSS communications receiver and demodulating finger is provided, capable of demodulating information channels in a plurality of sample streams. The system includes a plurality of demodulating fingers, with each demodulating finger accepting the plurality of sample streams. Each demodulating finger is connected to a controller to accept sample stream selection commands. Each demodulating finger demodulates information channels in the selected sample stream, providing soft symbols to a combiner.

Preferably, each demodulating finger includes a multiplexer (MUX) to accept the plurality of sample streams. Sample stream selection commands to the MUX control the MUX input selection. Each MUX has an output to provide the selected sample stream. Each demodulating finger also includes a plurality of finger channels, with each finger channel being coupled to the MUX to accept the selected sample stream, after a despreading operation. Each finger channel also accepts an uncovering code to uncover an information channel in the selected sample

stream, providing soft symbols from the uncovered information channel. Preferably, the uncovering code is generated external to the demodulating finger, and provided so that each finger channel receives an uncovering code corresponding to the information channel to be demodulated.

5 As mentioned above, IS-2000 standard transmissions involve the use of three independent carrier frequencies, which are converted into three corresponding sample streams. The controller determines which sample stream is to be demodulated by each demodulating finger, and sends sample stream selections accordingly. The demodulating finger has
10 the flexibility to demodulate any of the sample streams. That is, any sample stream may be selected for demodulation. For example, in one aspect of the invention the controller may select a different demodulating fingers for each of the three sample streams. In another aspects, the same sample stream can be simultaneously demodulated by two, three, or more
15 demodulating fingers. This latter feature permits a receiver to demodulate a sample stream with more information channels than there are finger channels, so that information channels in the sample stream are demodulated between the combination of two or more demodulating fingers. Further, the independent selection feature permits the
20 demodulating fingers to be used for soft handoffs and multipath demodulation. More importantly, the independent selection feature permits arbitrary demodulating finger and finger channel assignments for each sample stream.

A method is also provided for demodulating information
25 channels in a plurality of sample streams, derived from corresponding

carrier frequencies. The method comprises accepting a plurality of sample streams; selecting a sample stream from among the plurality of sample streams; and, providing soft symbols from the selected sample steam. Each sample stream includes a plurality of information channels, so that
 5 providing soft symbols includes providing soft symbols from a plurality of demodulated information channels in the selected sample stream.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates a conventional IS-95A or TIA/EIA-95-B
 10 forward link base station transmitter (prior art).

Fig. 2 is a conventional IS-95A or TIA/EIA-95-B CDMA receiver (prior art).

Fig. 3 is a schematic block diagram illustrating the present invention receiver.

15 Fig. 4 is a depiction of information channels transformed to corresponding carrier frequencies, sample streams, and soft symbols.

Fig. 5 is schematic block diagram detailing aspects of the receiver of Fig. 3.

20 Fig. 6 is a schematic block diagram illustrating the demodulating finger of the present invention.

Fig. 7 illustrates an example where three demodulating fingers each demodulate a different sample stream.

Fig. 8 illustrates an example where three demodulating fingers each demodulate the same sample stream.

004001 9834860

Fig. 9 illustrates an example where the demodulating fingers A through C can be used to improve the demodulation of sample streams that have suffered degradation due to multipath.

Fig. 10 is a flowchart illustrating the present invention method for a DSSS communications receiver to demodulate information channels in a plurality of sample streams.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 3 is a schematic block diagram illustrating the present invention receiver 100. Receiver 100 has an antenna 102 to accept a plurality of carrier signals, including carrier signals A, B, and C, represented by reference designators 104, 106, and 108, respectively, where each carrier signal has a different frequency. For simplicity, these carrier signals will be referred to herein as carriers.

The carriers 104-108 are input into a 90 degree phase shift block 110, where the in-phase and quadrature-phase portions of the carrier signal are separated into I and Q channels. Carriers A, B, and C are output from the 90 degree phase shift block 110 and provided to the A/D converter 112, where they are converted into respective sample streams A, B, and C. The sample streams are provided to each of the demodulating fingers, including demodulating finger A (114), demodulating finger B (116), demodulating finger C (118), and demodulating finger n (120), where n can be any whole number. In a preferred aspect of the invention, $n = 6$. As shown, the data lines

connecting the A/D converter 112 and the demodulating fingers 114-120 actually represent a plurality of sample streams, each having I and Q channels. Fig. 3 depicts three carriers (A, B, and C) and corresponding sample streams A, B, and C. However, the present invention is not
 5 limited to any particular number of carriers or sample streams.

Fig. 4 is a depiction of information channels transformed to corresponding carrier frequencies, sample streams, and soft symbols. Carrier A (104) (see Fig. 3) includes a plurality of modulated information channels, as depicted in the modulation process described above in the
 10 explanation of Fig. 1. Information channels 1, 2, up to n , are shown, where n can be any whole number. Typically, the information channels are traffic (voice and data) or paging channels, but they can also be synchronization or control channels. Carrier A is converted to sample stream A at the output of A/D converter 112 (see Fig. 3). Likewise, each
 15 carrier, or sample stream includes a plurality of information channels. Carrier B (sample stream B) includes information channels 1_0 , 2_0 , up to n_0 , and carrier C (sample stream C) includes information channels 1_1 , 2_1 , up to n_1 . As explained in more detail below, the demodulating fingers perform operations to despread and uncover the information channels to
 20 recover the soft symbols as is well known in the art. It should be understood that the operation of demodulation, as used herein, includes the operations of despreading, uncovering, accumulating, and pilot symbol dot product operations. It should also be understood that the various carriers and sample streams may include common information channels.
 25 That is, information channel 1 in sample stream A may be the same as

information channels 1_0 in sample stream B and information channels 1_1 in sample stream C. However, in some aspects of the invention, information channels from each sample stream may be combined into a common stream of soft symbols. Returning briefly to Fig. 1, the soft symbols at the output of the demodulating fingers are related to the coded data bits at the output of encoder 16. Although only three carriers (sample streams) are shown, the present invention is not limited to any particular number of carriers (sample streams).

Fig. 5 is a schematic block diagram detailing aspects of the receiver 100 of Fig. 3. Sample streams A, B, and C are depicted, with the I and Q channels being shown as a common data line for simplicity. Each of the carriers has an independent output from a separate 90 degree phase shift block, where carrier A is output from 90 degree block 110a, carrier B is output from 90 degree block 110b, and carrier C is output from 90 degree block 110c. Likewise, each of the sample streams has an independent output from a separate A/D converter, where sample stream A is output from A/D 112a, sample stream B is output from A/D 112b, and sample stream C is output from A/D 112c. Each of the demodulating fingers 114-120 has a sample stream input to receive the plurality of sample streams. As shown, sample streams A, B, and C are received by the demodulating fingers 114-120.

A controller 122 is shown having an output connected to a sample stream selection input of each of the demodulating fingers 114-120. The controller 122 supplies commands to each demodulating finger that select the sample stream to be demodulated. That is, each

demodulating finger selects a sample stream from the plurality of sample streams in response to sample stream selection commands from the controller 122. In response to the sample stream selection commands, each demodulating finger provides soft symbols from the selected sample stream to a combiner (not shown).

To demodulate the selected sample stream, each demodulating finger must essentially reverse the spreading and covering process described in the explanation of Fig. 1. Therefore, a PN sequence, one for each of the I and Q channels of the selected sample stream, is required. A distinct Walsh code is also required to uncover each of the information channels in the selected sample stream. It should be understood that a Walsh code, as used herein, is equivalent to an uncovering code. In some aspects of the invention, each demodulating finger generates the PN and Walsh codes needed for its despreading and uncovering operations. Alternately, some or all of these operations can be performed outside the demodulating finger. In the preferred aspect of the invention, a code generator block 126 supplies the PN and Walsh codes to each of the demodulating fingers 114-120.

Fig. 6 is a schematic block diagram illustrating the demodulating finger of the present invention. Specifically, demodulating finger A (114) is depicted, however, demodulating finger 114 is representative of the other demodulating fingers 114-120. The three sample streams are received at the sample stream input. A sample stream selection input receives sample stream selection commands, and a

code input receives the PN and Walsh codes required for the despreading and uncovering operations.

A MUX 200 has a plurality of sample stream inputs connected to the demodulating finger sample stream input. As shown, 5 MUX 200 has three sample stream inputs corresponding to the three sample streams. MUX 200 also has a sample stream selection input connected to the demodulating finger sample stream selection input to accept commands from the controller 122 (not shown). Once again it should be noted that the MUX 200 is not limited to any particular number 10 of inputs or sample streams. The MUX 200 selects a sample stream in response to the selection commands and provides the selected sample stream at an output. For simplicity, the I and Q channels of the sample streams are represented with a single data line.

The output of MUX 200 is connected to a despreading unit 15 202 which has an input to accept the I and Q channels of the selected sample stream. Despreading unit 202 also has a input, connected to the demodulating finger code input, to accept the PN sequence used to despread the selected sample stream. As explained above, separate I and Q PN sequences are required. The despread sample stream output from 20 despreading unit 202 is supplied to the sample stream input of a plurality of finger channels. Specifically, the sample streams are supplied to a plurality of uncovering units 204-208 associated with finger channels 210-214, respectively. Finger channels 210-214, with uncovering units 204-208, are depicted, but the invention is not limited to any particular 25 number of finger channels. Each of the uncovering units 204-208 accepts

a Walsh code from the demodulating finger code input, and ultimately, from the code generator 126 (see Fig. 5).

For example, sample stream A is selected for demodulation by demodulating finger A (114). Referring briefly to Fig. 4, it can be seen that sample stream A includes at least three information channels (1, 2, and n). Each of these information channels are covered in the transmitter with a Walsh code. For example, Walsh code H1 is used to cover information channel 1, Walsh code H2 is used to cover information channel 2, and Walsh code H n is used to cover information channel n . Returning to Fig. 6, Walsh code H1 is supplied to uncovering unit 204 to uncover information channel 1, Walsh code H2 is supplied to uncovering unit 206 to uncover information channel 2, and Walsh code H n is supplied to uncovering unit 208 to uncover information channel n .

The outputs of the uncovering units 204-208 are provided to respective accumulators 216-220 where the soft symbols are accumulated. The soft symbols are output by each finger channel 210-214, which are connected to the demodulating finger soft symbol output and, ultimately, to combiner 124 (see Fig. 3).

Fig. 7 illustrates an example where three demodulating fingers 114-118 each demodulate a different sample stream. The controller 122 (not shown) sends commands for demodulating finger A (114) to demodulate sample stream A. As a result, demodulating finger A (114) provides soft symbols from sample stream A at its soft symbol output. Likewise, the controller 122 (not shown) sends commands for demodulating finger B (116) to demodulate sample stream B and

demodulating finger C (118) to demodulate sample stream C. As a result, demodulating finger 116 provides soft symbols from sample stream B and demodulating finger 118 provides soft symbols from sample stream C at their respective soft symbol outputs. It is to be understood that there are
5 no predefined relationships between the demodulating fingers and the sample streams. In the above example, demodulating finger A (114) could have been selected to demodulate either sample stream B or C as an alternative to demodulating sample stream A. Further, more than three demodulating fingers can be used to demodulate a plurality of sample
10 streams, where each of the demodulating fingers operates on a selected sample stream from the plurality of sample streams.

Fig. 8 illustrates an example where three demodulating fingers 114-118 each demodulate the same sample stream. The controller 122 (not shown) sends commands for demodulating finger A (114) to
15 demodulate sample stream A. As a result, demodulating finger A (114) provides soft symbols from sample stream A at its soft symbol output. Likewise, the controller 122 (not shown) sends commands for demodulating finger B (116) to demodulate sample stream A and demodulating finger C (118) to demodulate sample stream A. As a result,
20 demodulating finger B (116) provides soft symbols from sample stream A, and demodulating finger C (118) provides soft symbols from sample stream A at their respective soft symbol outputs. Alternately, only two, or more than three, demodulating fingers can be selected to demodulate sample stream A. As another alternative, the demodulating fingers 114-
25 118 could all have been selected to demodulate sample steam B or C.

Fig. 9 illustrates an example where the demodulating fingers A (114) through C (118) can be used to improve the demodulation of sample streams that suffered degradation due to multipath. For example, carrier A (104) may be received with a plurality of multipath delays.

5 These multipath delays are converted into sample stream A having a plurality of sample stream delays. Each of the sample stream delays can be assigned to a different demodulating finger for demodulation. For example, a first delay of sample stream A can be demodulated at demodulating finger A (114), a second delay at demodulating finger B
10 (116), and a third delay at demodulating finger C (118). The controller (not shown) of the present invention can assign each delay to a different demodulating finger, and the present invention is only limited by the total number of demodulating fingers in the receiver.

Fig. 10 is a flowchart illustrating the present invention
15 method for a DSSS communications receiver to demodulate information channels in a plurality of sample streams. Although the method is presented as a sequence of numbered steps for clarity, no order should be inferred from the numbering unless explicitly stated. Step 300 is the start. Step 302 accepts a plurality of sample streams. Step 304 selects a
20 sample stream from among the plurality of sample streams. Step 306 is a product, where soft symbols are provided from the selected sample steam.

In some aspects of the invention, the accepting of the plurality of sample streams in Step 302 includes each sample stream having an information channel, and the providing soft symbols in Step
25 306 includes providing soft symbols from a demodulated information

channel in the selected sample stream. The method includes Step 305a, which accepts a Walsh code. Then, Step 305b uncovers the information channel with the Walsh code. Typically, the accepting of the plurality of sample streams in Step 302 includes each sample stream having a plurality of information channels, and the providing the soft symbols in Step 306 includes providing soft symbols from a plurality of demodulated information channels in the selected sample stream.

In some aspects of the invention, the selecting of a sample stream in Step 304 includes selecting each sample stream from the plurality of sample streams, so that Step 306 provides soft symbols from each of the plurality of sample streams.

In some aspects of the invention, Step 300 starts with the inclusion of a demodulating finger. Then, the demodulating finger accepts the plurality of sample streams in Step 302. The demodulating finger accepts sample stream selection commands in Step 304, and provides the soft symbols from the selected sample stream in Step 306. In some aspects of the invention, a controller is included. Then, Step 304 includes the controller selecting the sample stream, and the demodulating finger accepting sample stream selection commands from the controller.

Typically, the receiver includes a plurality of demodulating fingers. Then, each demodulating finger accepts the plurality of sample streams in Step 302. The controller selects a sample stream for each demodulating finger in Step 304. Each demodulating finger accepts sample stream selection commands from the controller in Step 304, and provides the soft symbols from the selected sample stream in Step 306.

Typically, the method includes further steps. Step 301a
 accepts a plurality of carriers. Step 301b converts each carrier from the
 plurality of carriers into a plurality of sample streams. Then, the
 accepting of a plurality of sample streams in Step 302 includes accepting a
 5 sample stream from each carrier in the plurality of carriers.

As an example, Step 300 could start with the inclusion of a
 first, second and third demodulating finger. The receiving a plurality of
 carriers in Step 301a includes receiving a first, second, and third carrier.
 The converting each carrier from the plurality of carriers in Step 301b
 10 includes converting the first carrier to a first sample stream, the second
 carrier to a second sample stream, and a third carrier to a third sample
 stream. The first, second, and third demodulating fingers accept the first,
 second, and third sample streams in Step 302, and the controller selects
 the first sample stream for the first demodulating finger, the second
 15 sample stream for the second demodulating finger, and the third sample
 stream for the third demodulating finger in Step 304.

As another example, Step 300 may start with the inclusion of
 a first and second demodulating finger. The receiving a plurality of
 carriers in Step 301a includes receiving a first, second, and third carrier.
 20 The converting of each carrier from the plurality of carriers in Step 301b
 includes converting the first carrier to a first sample stream, the second
 carrier to a second sample stream, and a third carrier to a third sample
 stream. The first and second demodulating fingers accept the first,
 second, and third sample streams in Step 302, and the controller selects

the first sample stream for the first demodulating finger and the first sample stream for the second demodulating finger in Step 304.

As yet another example, Step 300 could start with the inclusion of a first, second and third demodulating finger. The receiving a plurality of carriers in Step 301a includes receiving a first carrier with a plurality of multipath delays, including a first, second, and third delay. The converting each carrier from the plurality of carriers in Step 301b includes converting the first carrier with a plurality of delays into a first sample stream with a plurality of delays, including a first, second, and third delay. The first, second, and third demodulating fingers accept the first sample stream with the plurality of delays in Step 302, and the controller selects the first sample stream first delay for the first demodulating finger, the first sample stream second delay for the second demodulating finger, and the first sample stream third delay for the third demodulating finger in Step 304.

A receiver system and method have been presented above for the selection of a sample stream for demodulation, from among a plurality of sample streams. The invention has been described in the context of receiving a plurality of sample stream from a corresponding plurality of carriers, with the assumption that the carriers are transmitted from the same source. The invention is also applicable to the selection of a sample stream, however the sample streams are received. It is conceivable that the plurality of sample streams could include sample streams from different wireless sources or different antennae, to name but a few examples. The assumption has also been made in the above description of

[illegible]

CLAIMS

What is claimed is:

1. In a direct sequence spread spectrum (DSSS) communications receiver, a system for demodulating information channels in a plurality of sample streams, the system comprising:
- 5 a controller having an output to select a sample stream; and
a plurality of demodulating fingers, each demodulating finger having a sample stream input to accept the plurality of sample streams, a selection input connected to the controller output to accept sample stream selection commands, and each demodulating finger demodulating information channels to provide soft symbols from the selected sample stream at a soft symbol output.
- 10
2. The system of claim 1 wherein each demodulating finger includes:
- 15 a MUX having a first input connected to the demodulating finger sample stream input to accept the plurality of sample streams, a second input connected to the demodulating finger selection input to accept sample stream selection commands, and an output to provide the selected sample stream.
- 20
3. The system of claim 2 wherein each demodulating finger further includes:

a plurality of finger channels, wherein each finger channel includes a sample stream input connected to the MUX output to accept the selected sample stream, a code input to accept an uncovering code, each finger channel demodulating an information channel in the selected sample stream in response to the accepted uncovering code to provide soft symbols at a soft symbol output connected to the demodulating finger soft symbol output.

4. The system of claim 3 further comprising:
a code generator having an output to provide uncovering codes; and
wherein each demodulating finger further includes a code input connected to the code generator output to accept uncovering codes; and
wherein the code input of each finger channel is connected to the demodulating finger code input to accept uncovering codes.

5. The system of claim 1 in which the plurality of sample streams are converted from a plurality of accepted carriers; and
wherein each demodulating finger accepts sample streams converted from the plurality of carriers.

6. The system of claim 5 wherein the controller selects a sample stream for each of the demodulating fingers from the plurality of sample streams.

7. The system of claim 6 in which three sample streams are respectively converted from a first, second, and third carrier;

wherein the controller assigns a first sample stream, from
5 the first carrier, to a first demodulating finger from the plurality of demodulating fingers;

wherein the controller assigns a second sample stream, from the second carrier, to a second demodulating finger from the plurality of demodulating fingers; and

10 wherein the controller assigns a third sample stream, from the third carrier, to a third demodulating finger from the plurality of demodulating fingers.

8. The system of claim 6 in which three sample streams
15 are respectively converted from a first, second, and third carrier;

wherein the controller assigns a first sample stream, from the first carrier, to a first demodulating finger from the plurality of demodulating fingers; and

20 wherein the controller assigns the first sample stream, from the first carrier, to a second demodulating finger from the plurality of demodulating fingers.

9. The system of claim 8 wherein the controller assigns the sample stream, from the first carrier, to a third demodulating finger
25 from the plurality of demodulating fingers.

10. The system of claim in which a first carrier is received
with a least a first and second multipath delay, and in which the first
carrier first and second multipath delays are converted into a first sample
5 stream with at least a first and second delay;

wherein the controller assigns the first sample stream first
delay to a first demodulating finger from the plurality of demodulating
fingers; and

wherein the controller assigns the first sample stream second
10 delay to a second demodulating finger from the plurality of demodulating
fingers.

11. In a direct sequence spread spectrum (DSSS)
communications receiver, a demodulating finger for demodulating
15 information channels in a plurality of sample streams, the demodulating
finger comprising:

a sample stream input to accept the plurality of sample
streams;

a selection input to accept sample stream selection
20 commands; and

a soft symbol output to provide soft symbols from
demodulated information channels in the selected sample stream.

12. The demodulating finger of claim 11 further
25 comprising:

5 a MUX having a first input connected to the demodulating finger sample stream input to accept the plurality of sample streams, a second input connected to the demodulating finger selection input to accept sample stream selection commands, and an output to provide the selected sample stream.

13. The demodulating finger of claim 12 further comprising:

10 a plurality of finger channels, wherein each finger channel includes a sample stream input connected to the MUX output to accept the selected sample stream, a code input to accept an uncovering code, each finger channel demodulating an information channel in the selected sample stream in response to the accepted uncovering code to provide soft symbols at a soft symbol output connected to the demodulating finger soft
15 symbol output.

14. The demodulating finger of claim 13 wherein each demodulating finger further includes:

20 a code input to accept a plurality of uncovering codes; and wherein the code input of each finger channel is connected to the demodulating finger code input to accept an uncovering code.

15. The demodulating finger of claim 11 in which the plurality of sample streams correspond to a plurality of converted carriers;
25 and

wherein the demodulating finger accepts the plurality of sample streams converted from the plurality of carriers.

16. The demodulating finger of claim 15 in which a first, second, and third sample stream are respectively converted from a first, second, and third carrier;

wherein the demodulating finger accepts commands for the selection of a sample stream from the group including first, second, and third sample streams.

10

17. In a direct sequence spread spectrum (DSSS) communications receiver, a method for demodulating information channels in a plurality of sample streams, the method comprising:

accepting a plurality of sample streams;

selecting a sample stream from among the plurality of sample streams; and

providing soft symbols from the selected sample steam.

15

18. The method of claim 17 wherein accepting the plurality of sample streams includes each sample stream having an information channel; and

wherein providing soft symbols includes providing soft symbols from an uncovered information channel in the selected sample stream.

25

19. The method of claim 18 further comprising:
uncovering the information channel with a Walsh code.

20. The method of claim 19 further comprising:
5 preceding the uncovering of the information channel with the
Walsh code, accepting the Walsh code.

21. The method of claim 18 wherein accepting the
plurality of sample streams includes each sample stream having a
10 plurality of information channels; and
wherein providing the soft symbols includes providing soft
symbols from a plurality of demodulated information channels in the
selected sample stream.

22. The method of claim 17 wherein selecting a sample
15 stream includes selecting each sample stream from the plurality of sample
streams; and

wherein providing soft symbols from the selected sample
stream includes providing soft symbols from each of the plurality of
20 sample streams.

23. The method of claim 17 in which a demodulating
finger is included; and
wherein the demodulating finger accepts the plurality of
25 sample streams;

wherein the demodulating finger accepts sample stream selection commands; and

wherein the demodulating finger provides the soft symbols from the selected sample stream.

5

24. The method of claim 23 in which a controller is included, and the method further comprising:

the controller selecting the sample stream; and

wherein the demodulating finger accepts sample stream selection commands from the controller.

10

25. The method of claim 24 in which a plurality of demodulating fingers are included;

wherein each demodulating finger accepts the plurality of sample streams;

15

wherein the controller selects a sample stream for each demodulating finger;

wherein each demodulating finger accepts sample stream selection commands from the controller; and

wherein each demodulating finger provides the soft symbols from the selected sample stream.

20

26. The method of claim 25 further comprising:
receiving a plurality of carriers; and

converting each carrier from the plurality of carriers to a sample stream in a plurality of sample streams.

27. The method of claim 25 in which a first, second and
5 third demodulating finger are included;

wherein receiving a plurality of carriers includes receiving a first, second, and third carrier;

wherein converting each carrier from the plurality of carriers includes converting the first carrier to a first sample stream, the second
10 carrier to a second sample stream, and a third carrier to a third sample stream; and

wherein the controller selects the first sample stream for the first demodulating finger, the second sample stream for the second demodulating finger, and the third sample stream for the third
15 demodulating finger.

28. The method of claim 25 in which a first and second demodulating finger are included;

wherein receiving a plurality of carriers includes receiving a
20 first, second, and third carrier;

wherein converting each carrier from the plurality of carriers includes converting the first carrier to a first sample stream, the second carrier to a second sample stream, and a third carrier to a third sample stream;

wherein the first and second demodulating fingers accept the first, second, and third sample streams; and

wherein the controller selects the first sample stream for the first demodulating finger and the first sample stream for the second
5 demodulating finger.

29. The method of claim 25 in which a first, second, and third demodulating finger are included;

wherein receiving a plurality of carriers includes receiving a
10 first carrier with a plurality of multipath delays, including a first, second, and third delay;

wherein converting each carrier from the plurality of carriers includes converting the first carrier with the plurality of delays to a first sample stream with a plurality of delays, including a first, second, and
15 third delay;

wherein the first, second, and third demodulating fingers accept the first sample stream with the plurality of delays; and

wherein the controller selects the first sample stream first delay for the first demodulating finger, the first sample stream second
20 delay for the second demodulating finger, and the first sample stream third delay for the third demodulating finger.

5

10

15

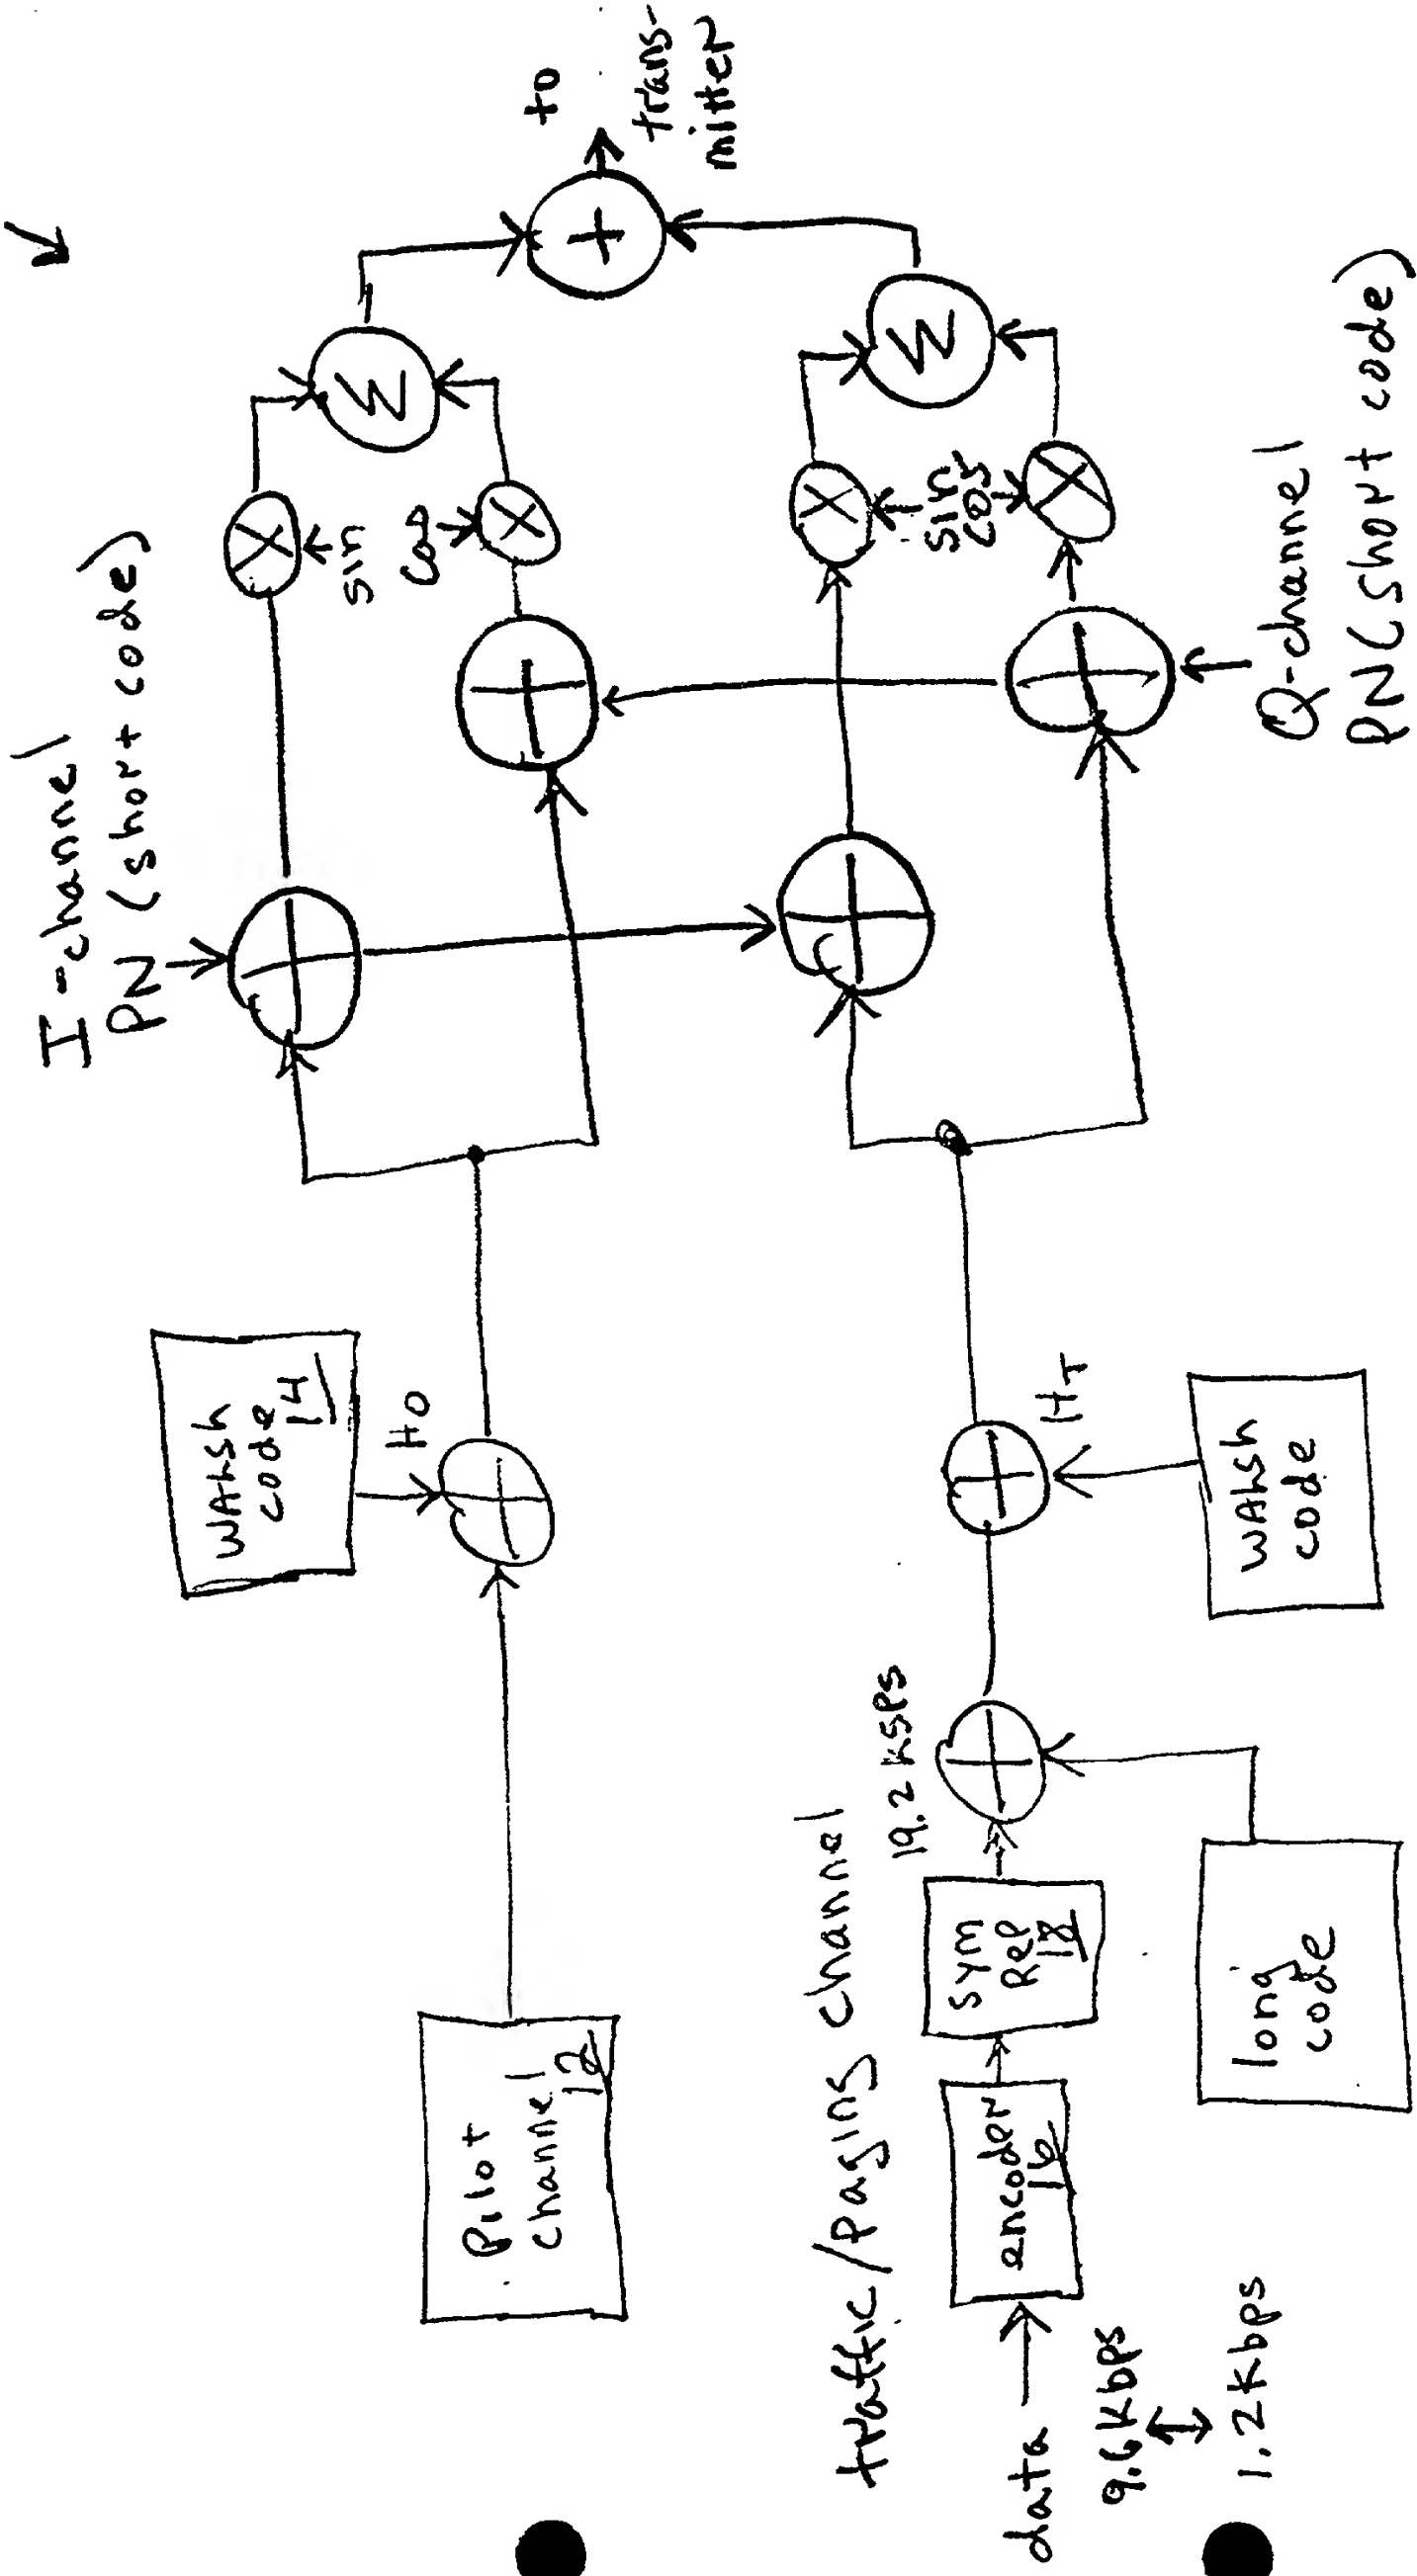


Fig. 1 (prior art)

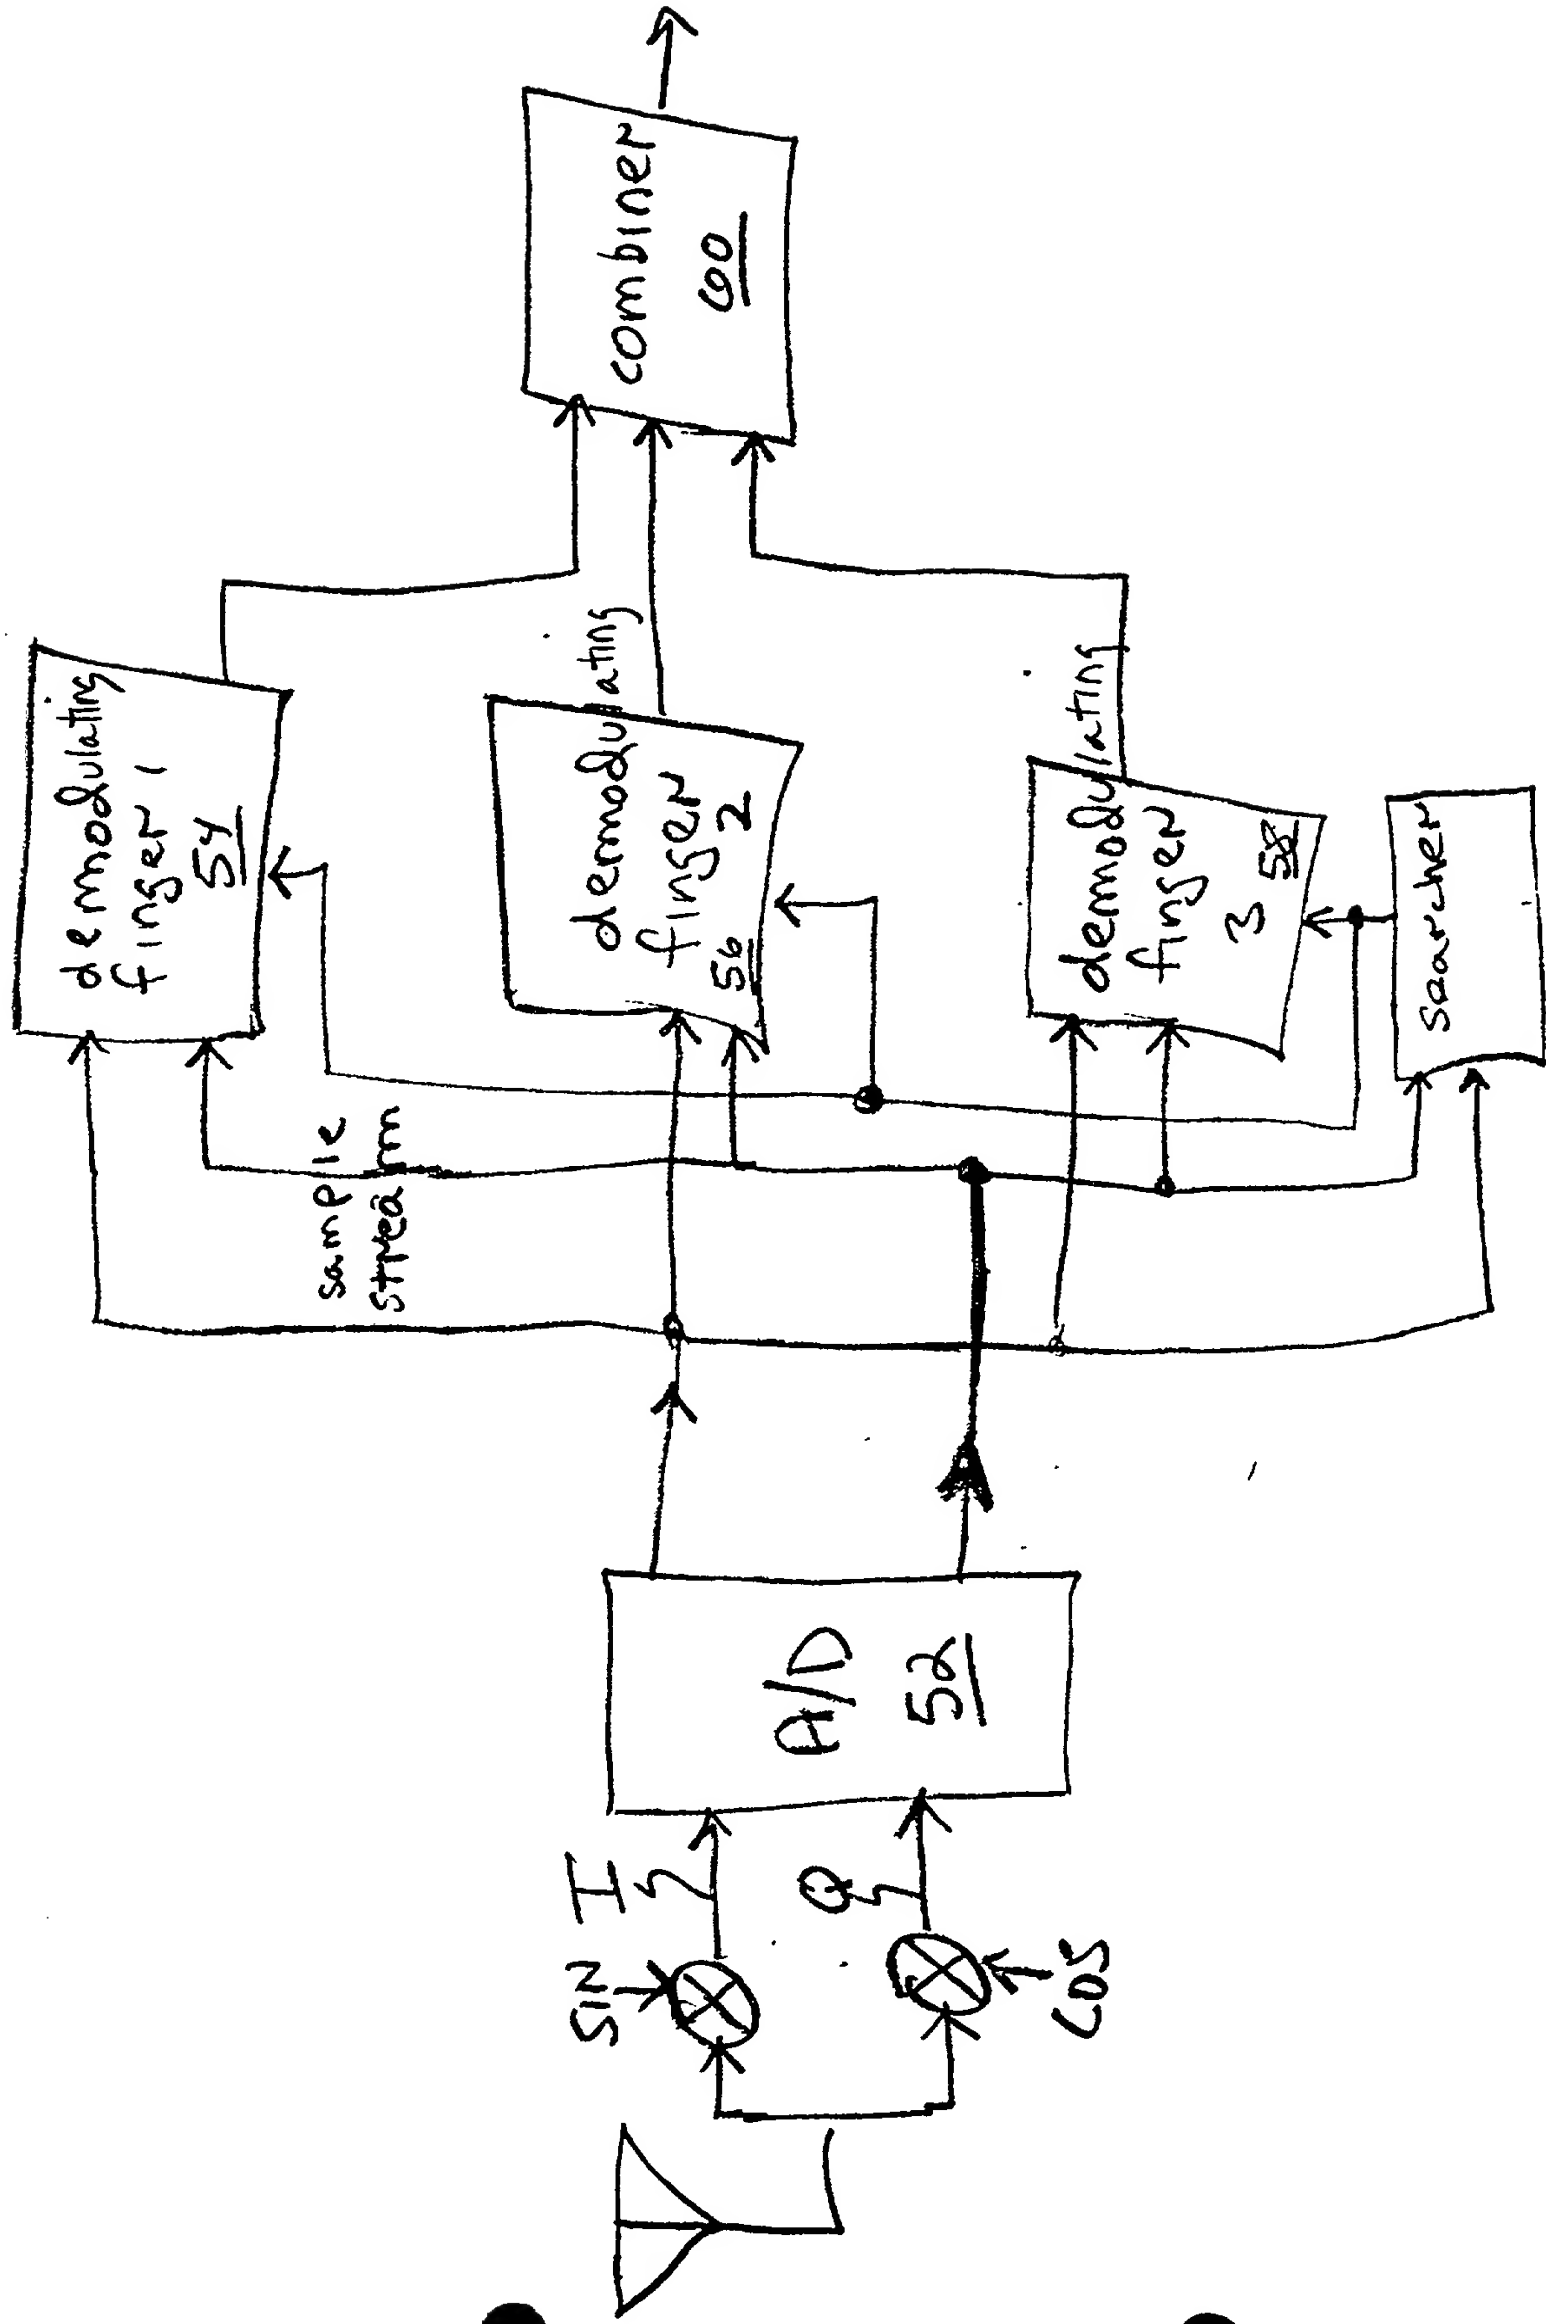


Fig. 2 (Prior art)

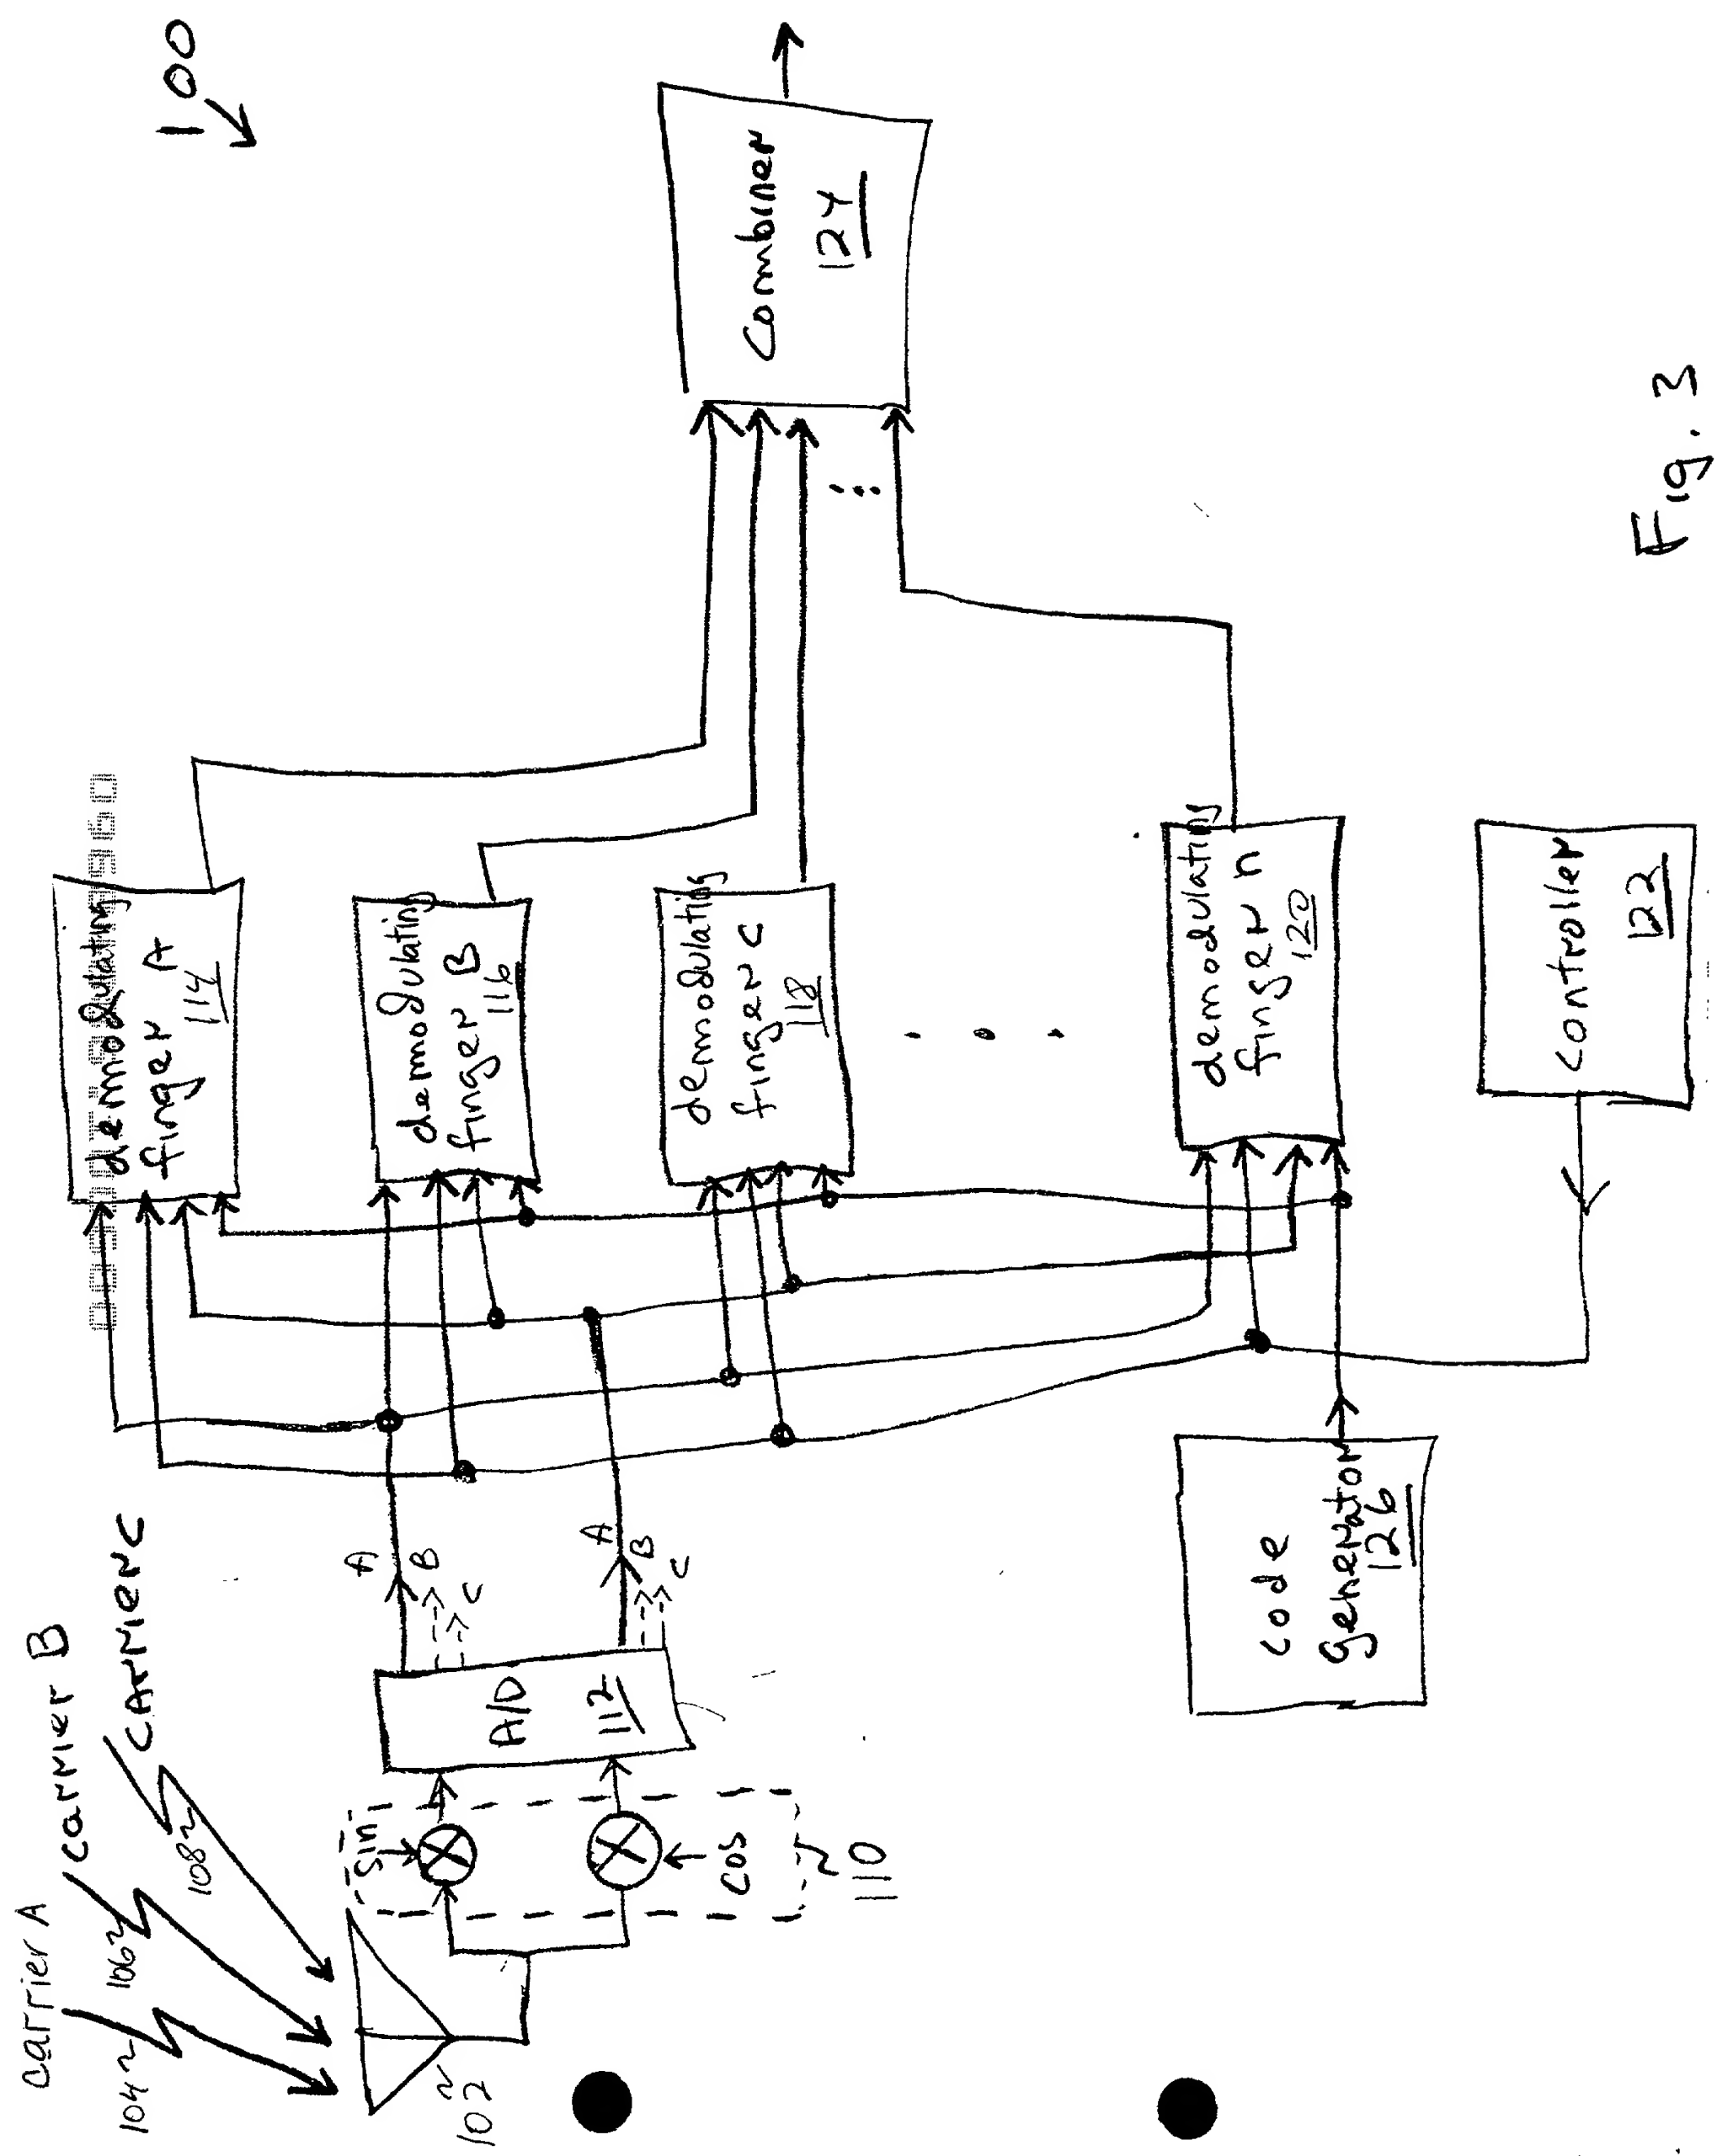


Fig. 3

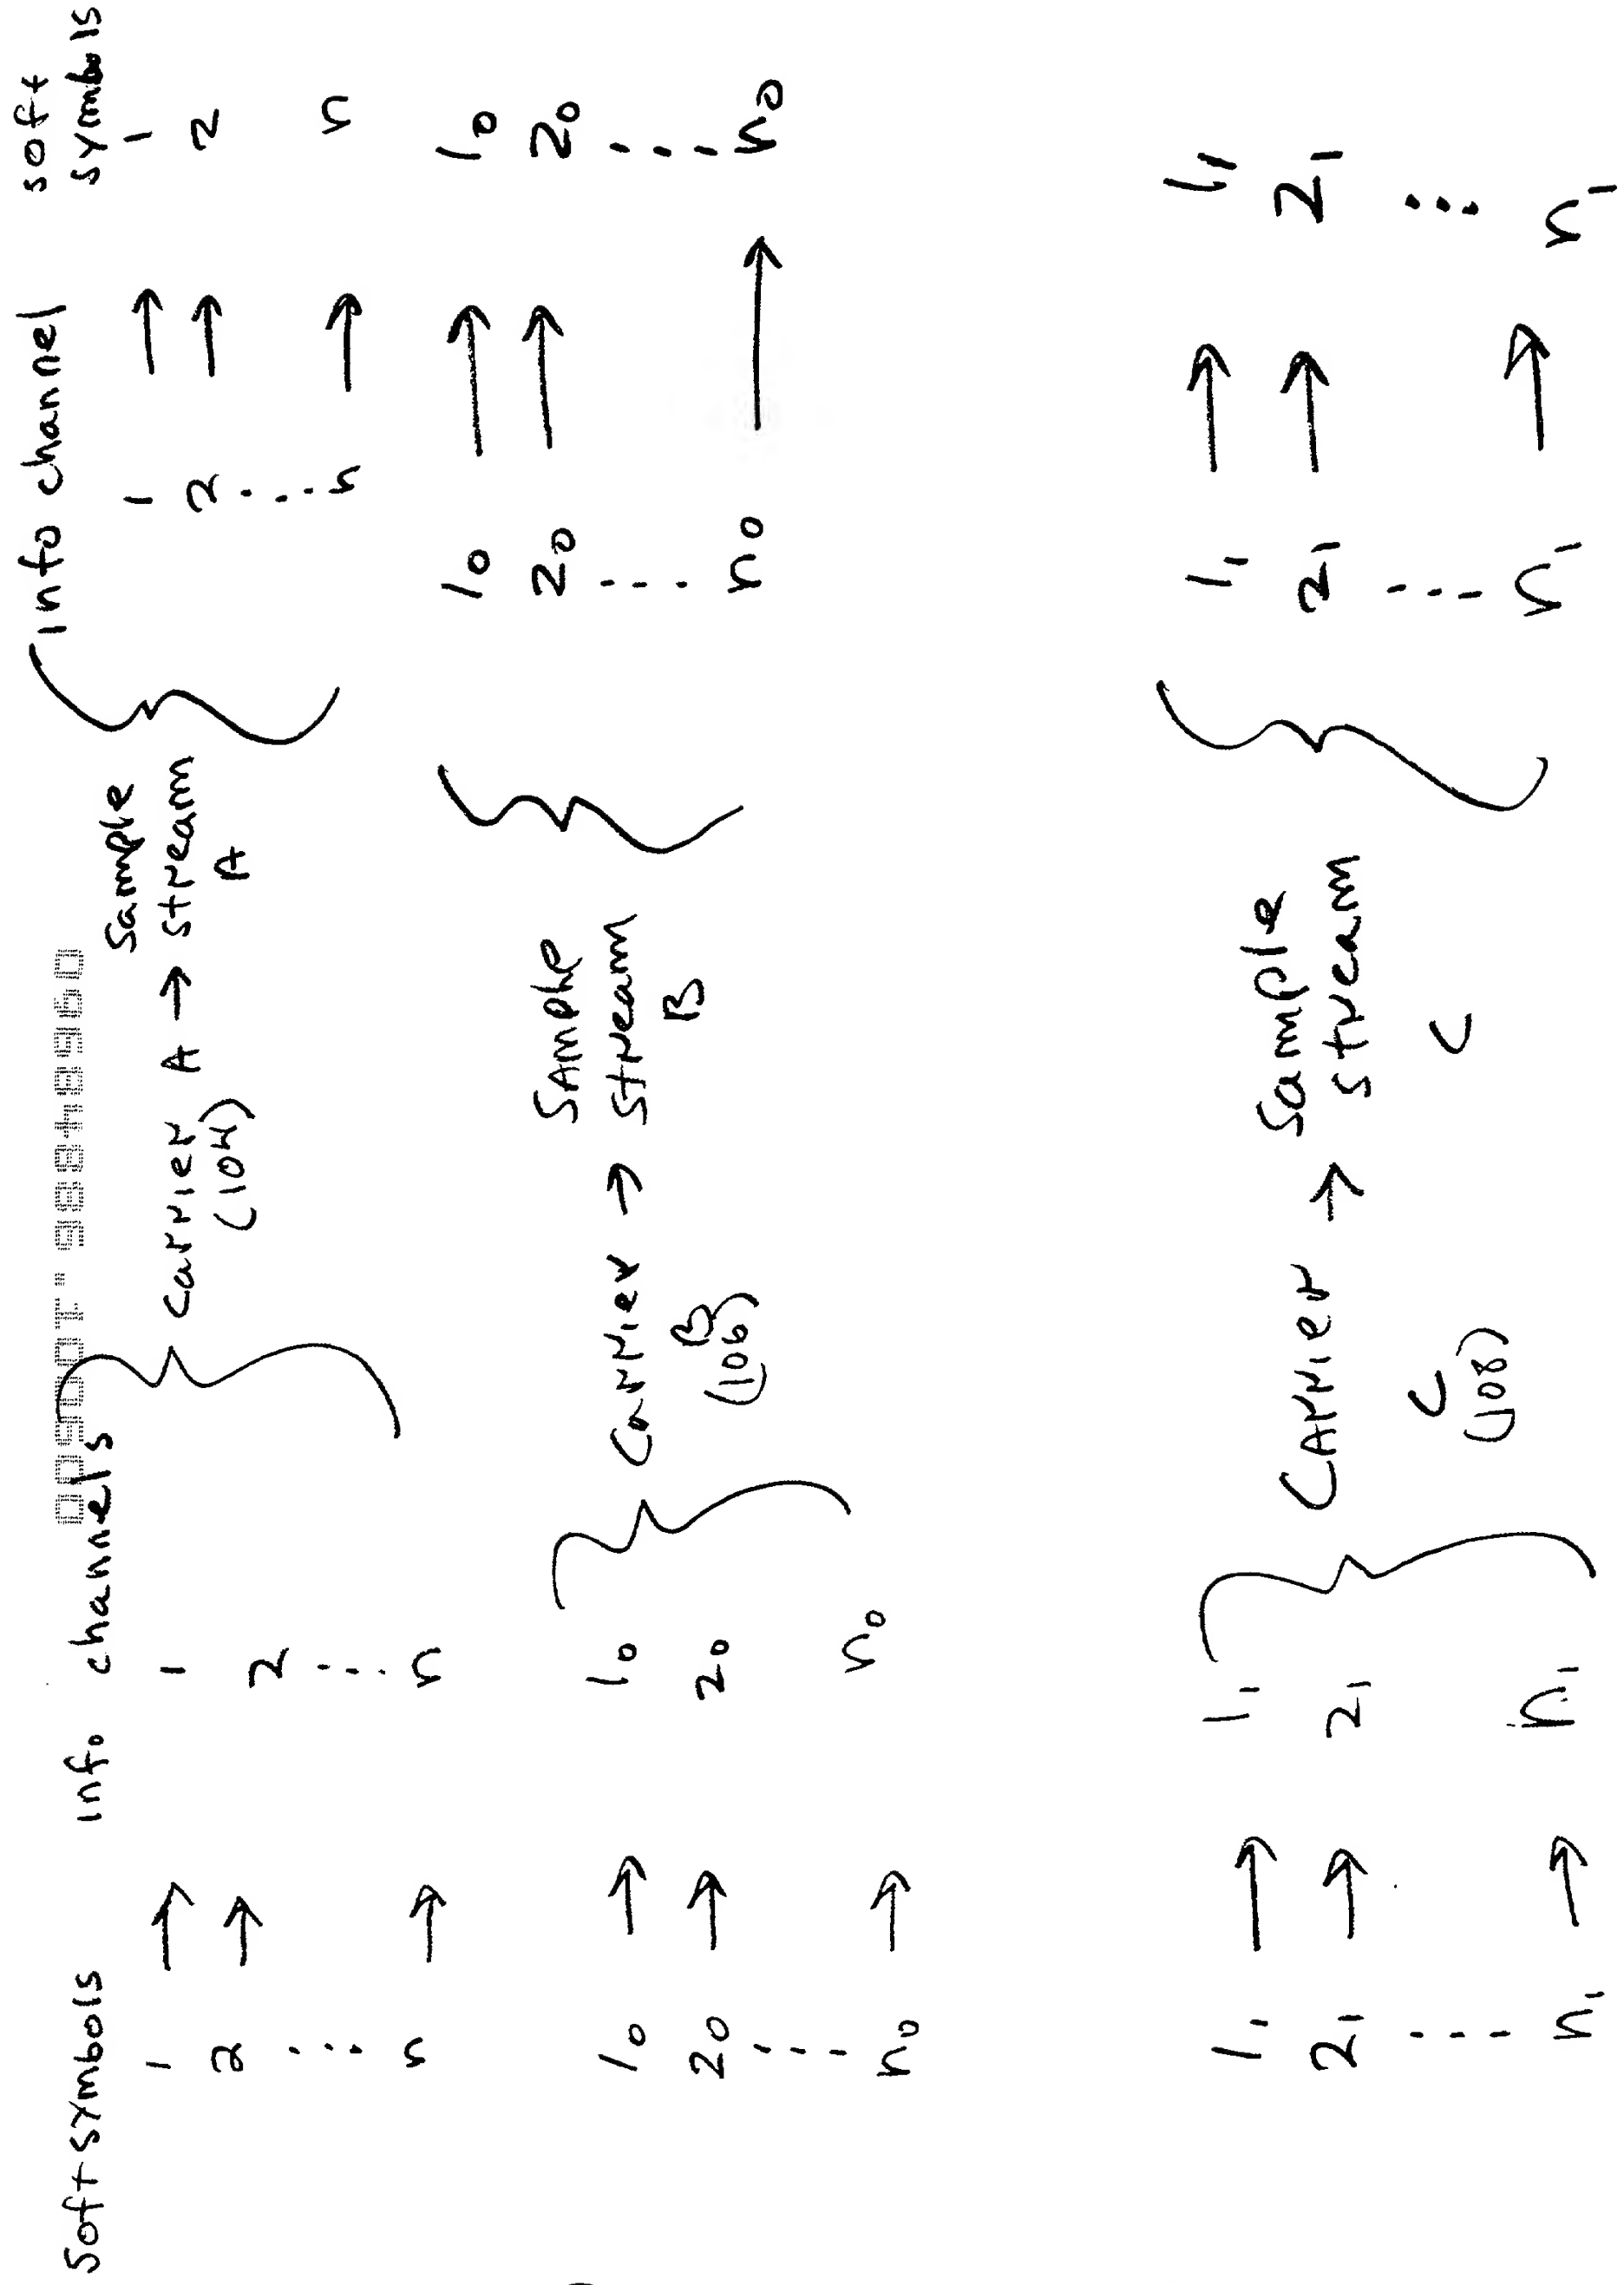


Fig 4

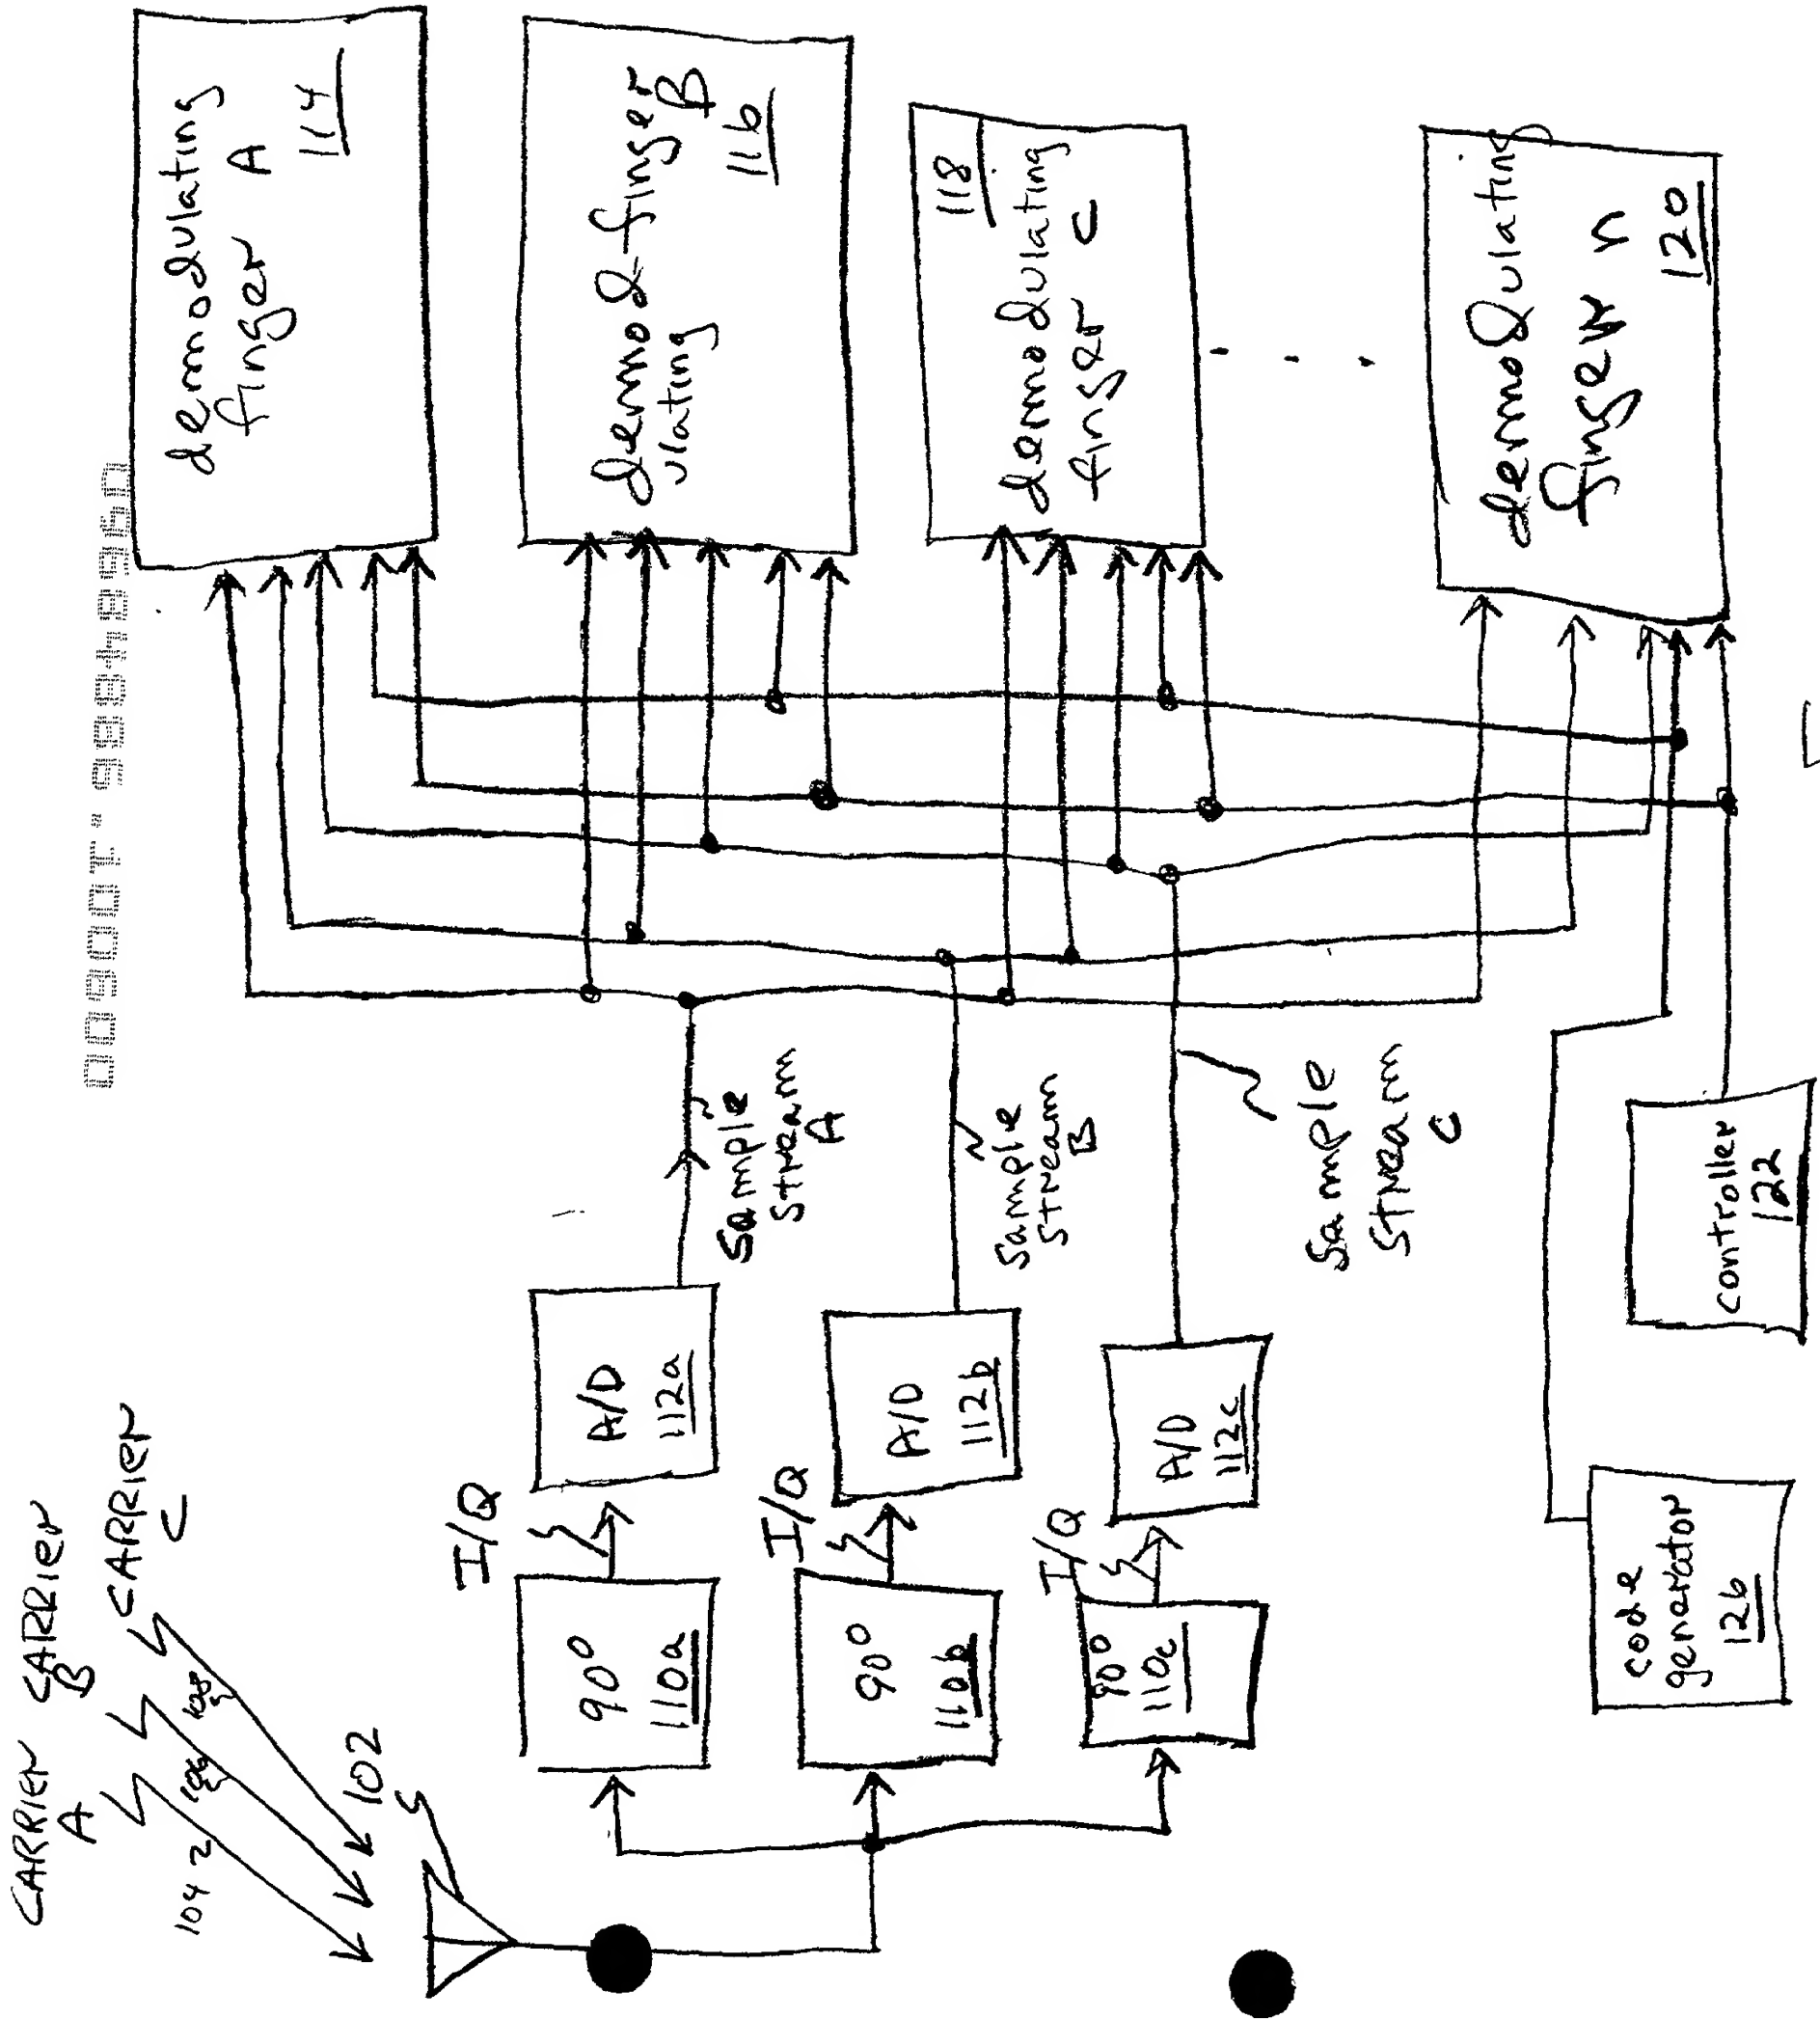


Fig. 5

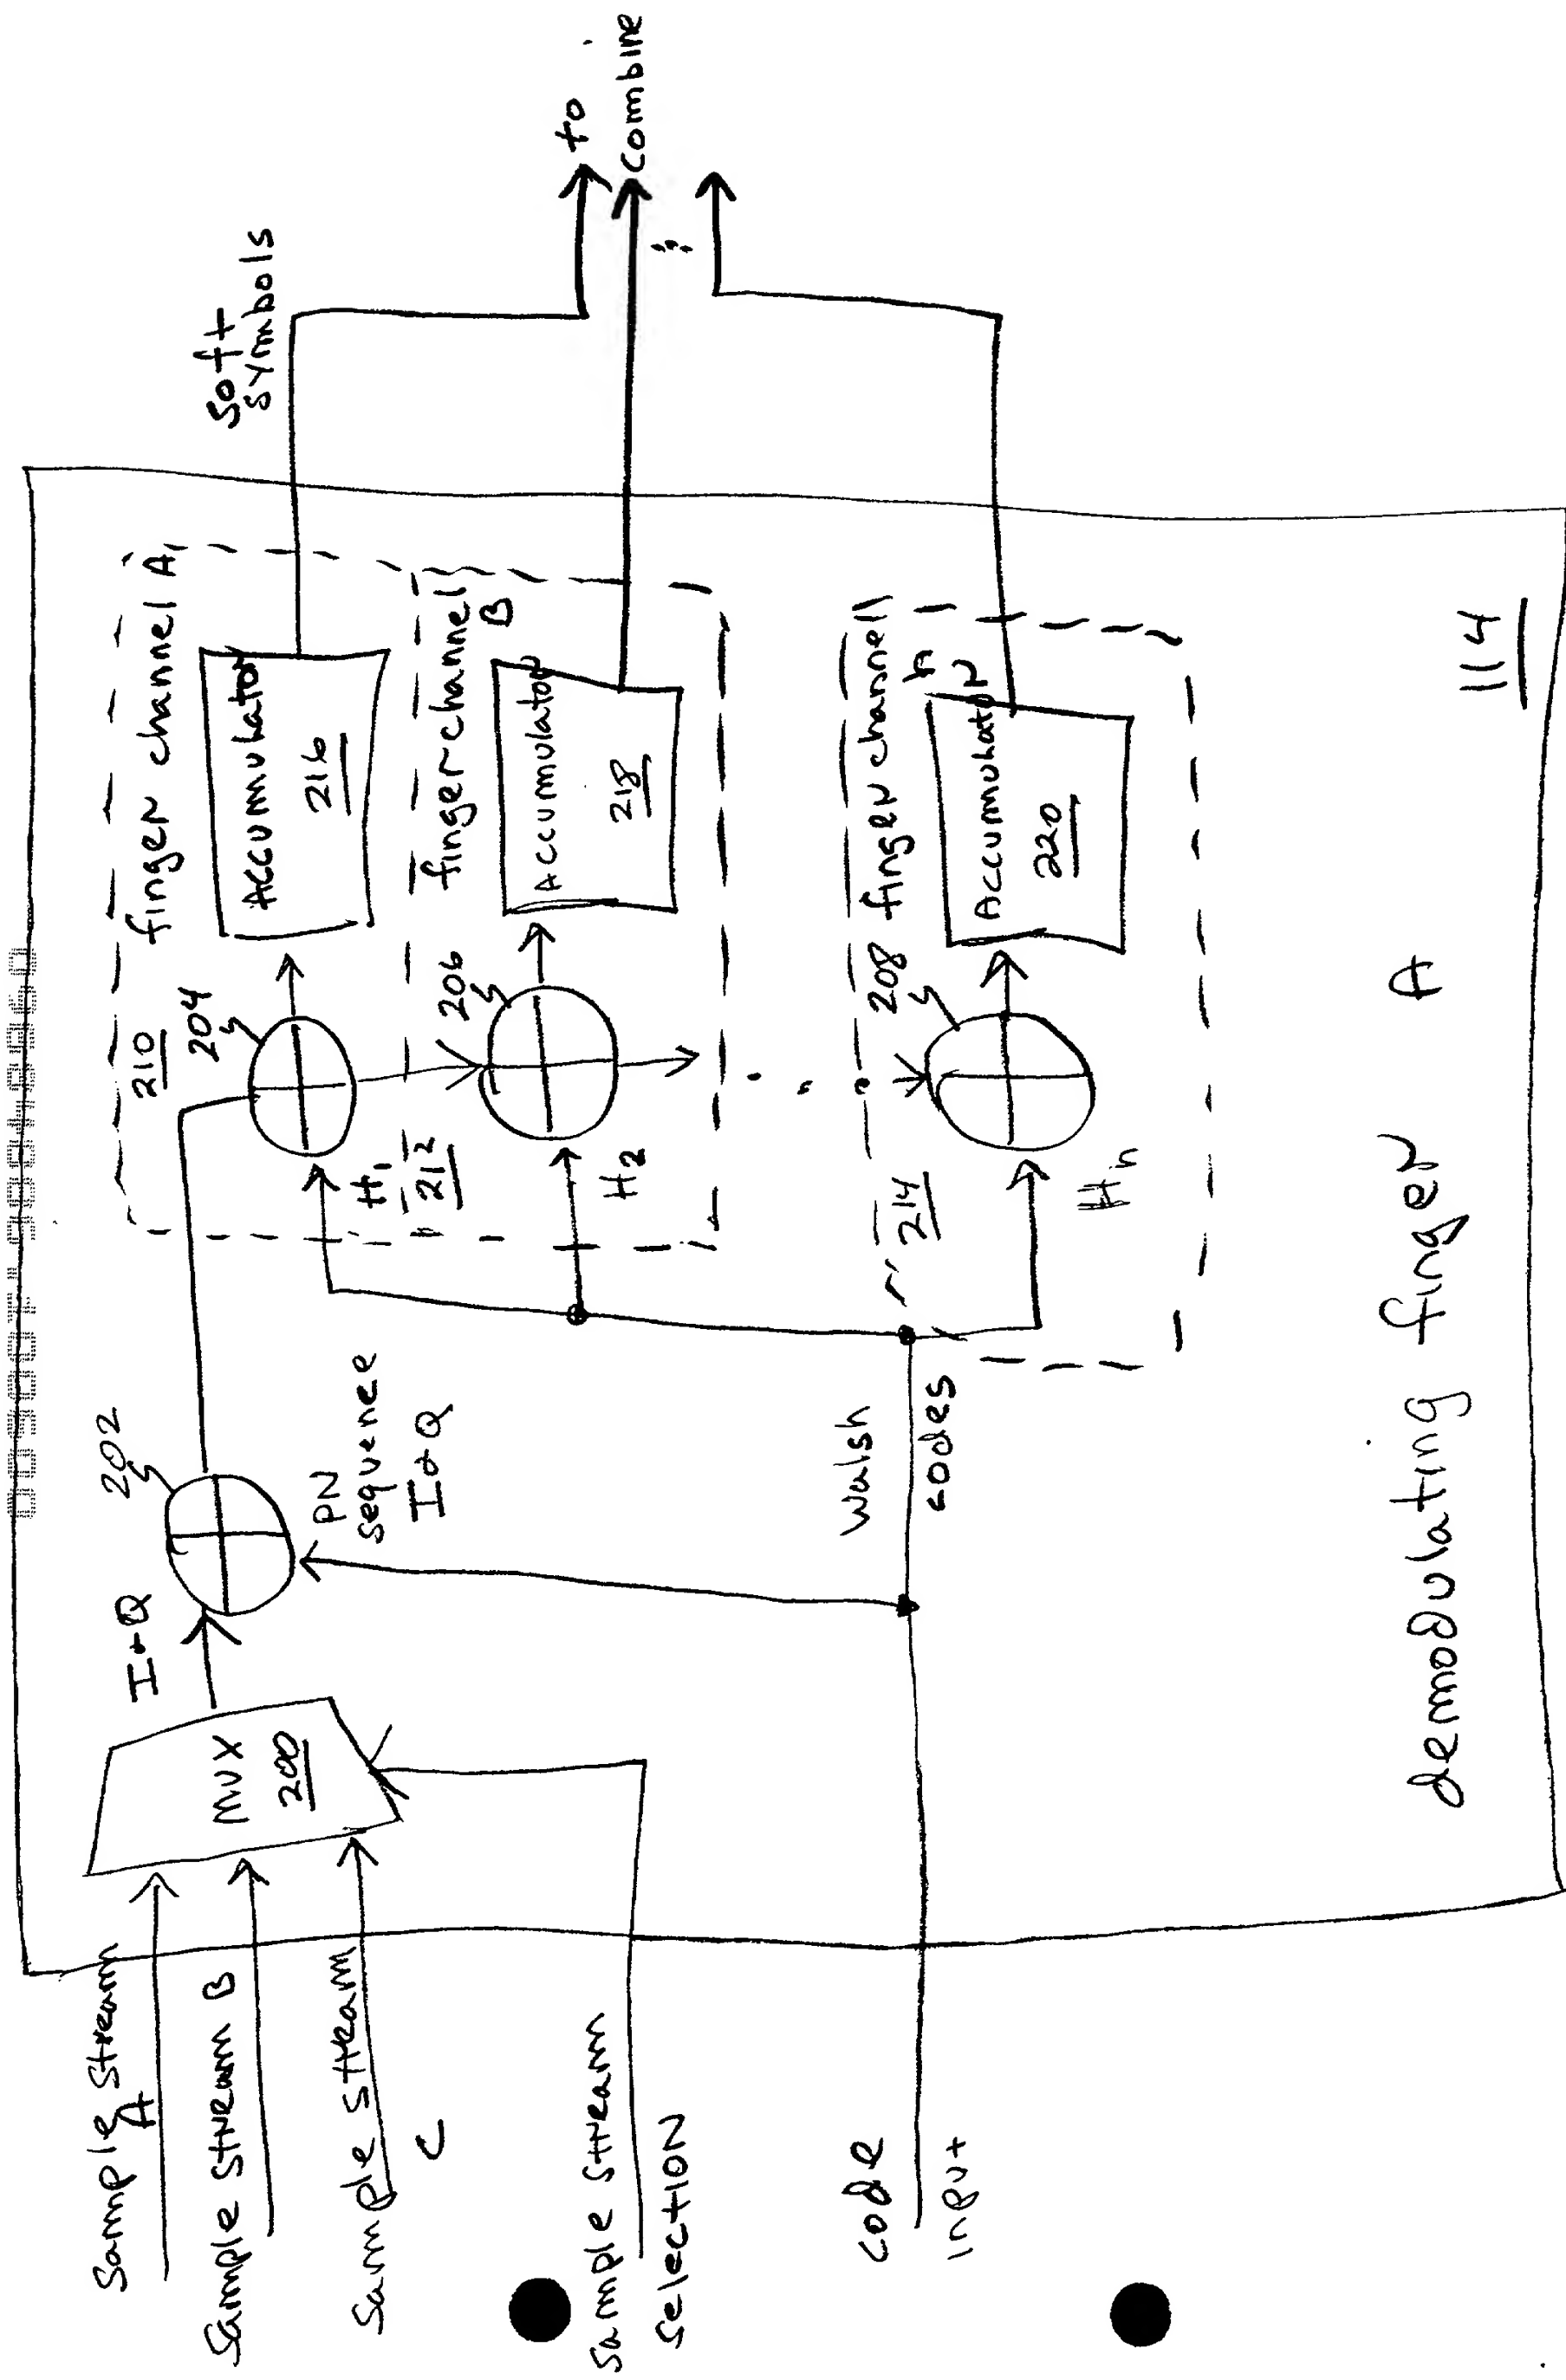


Fig. 6

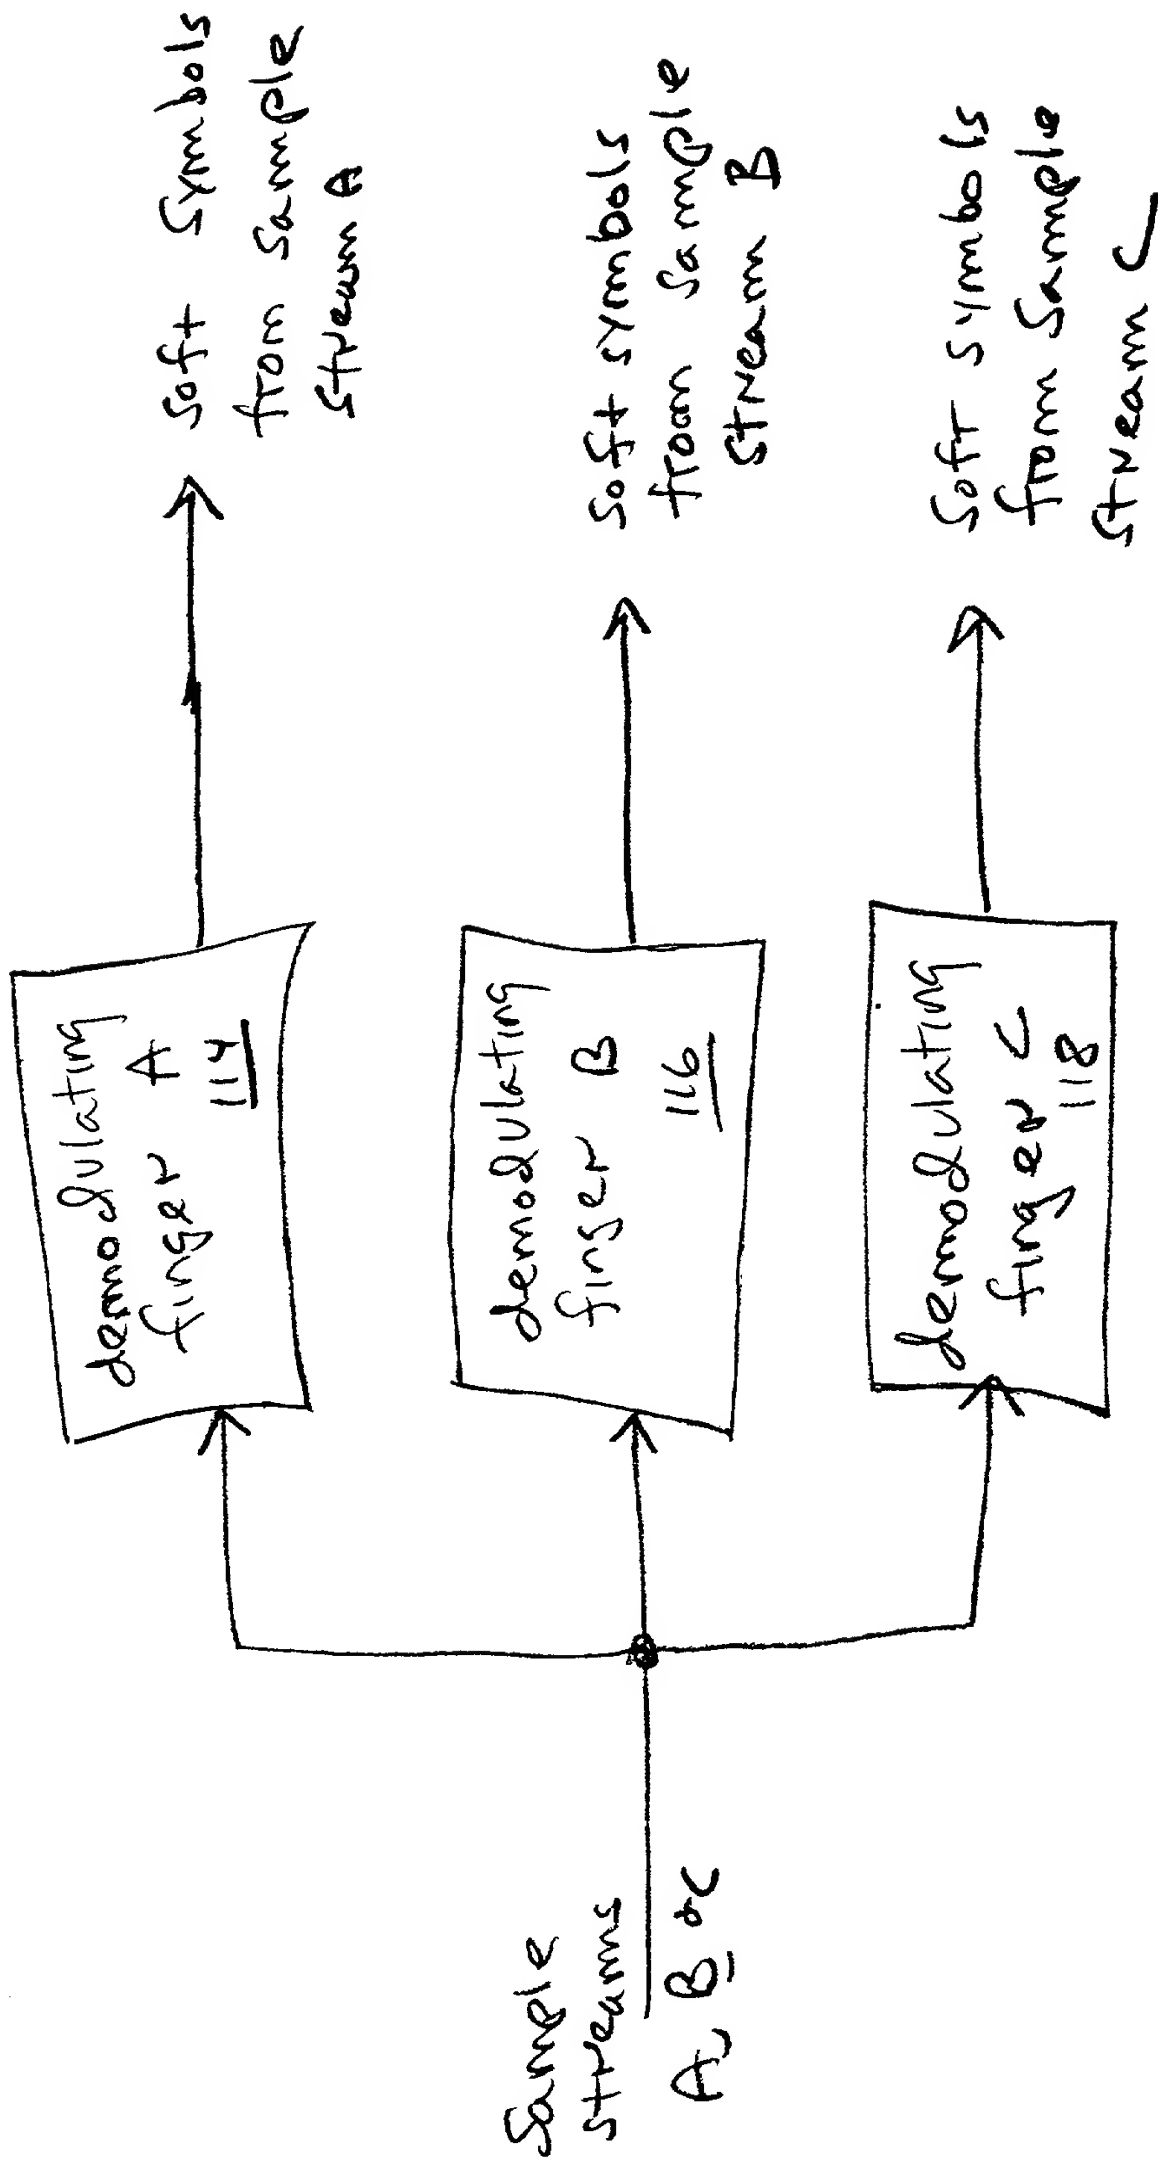


Fig. 7

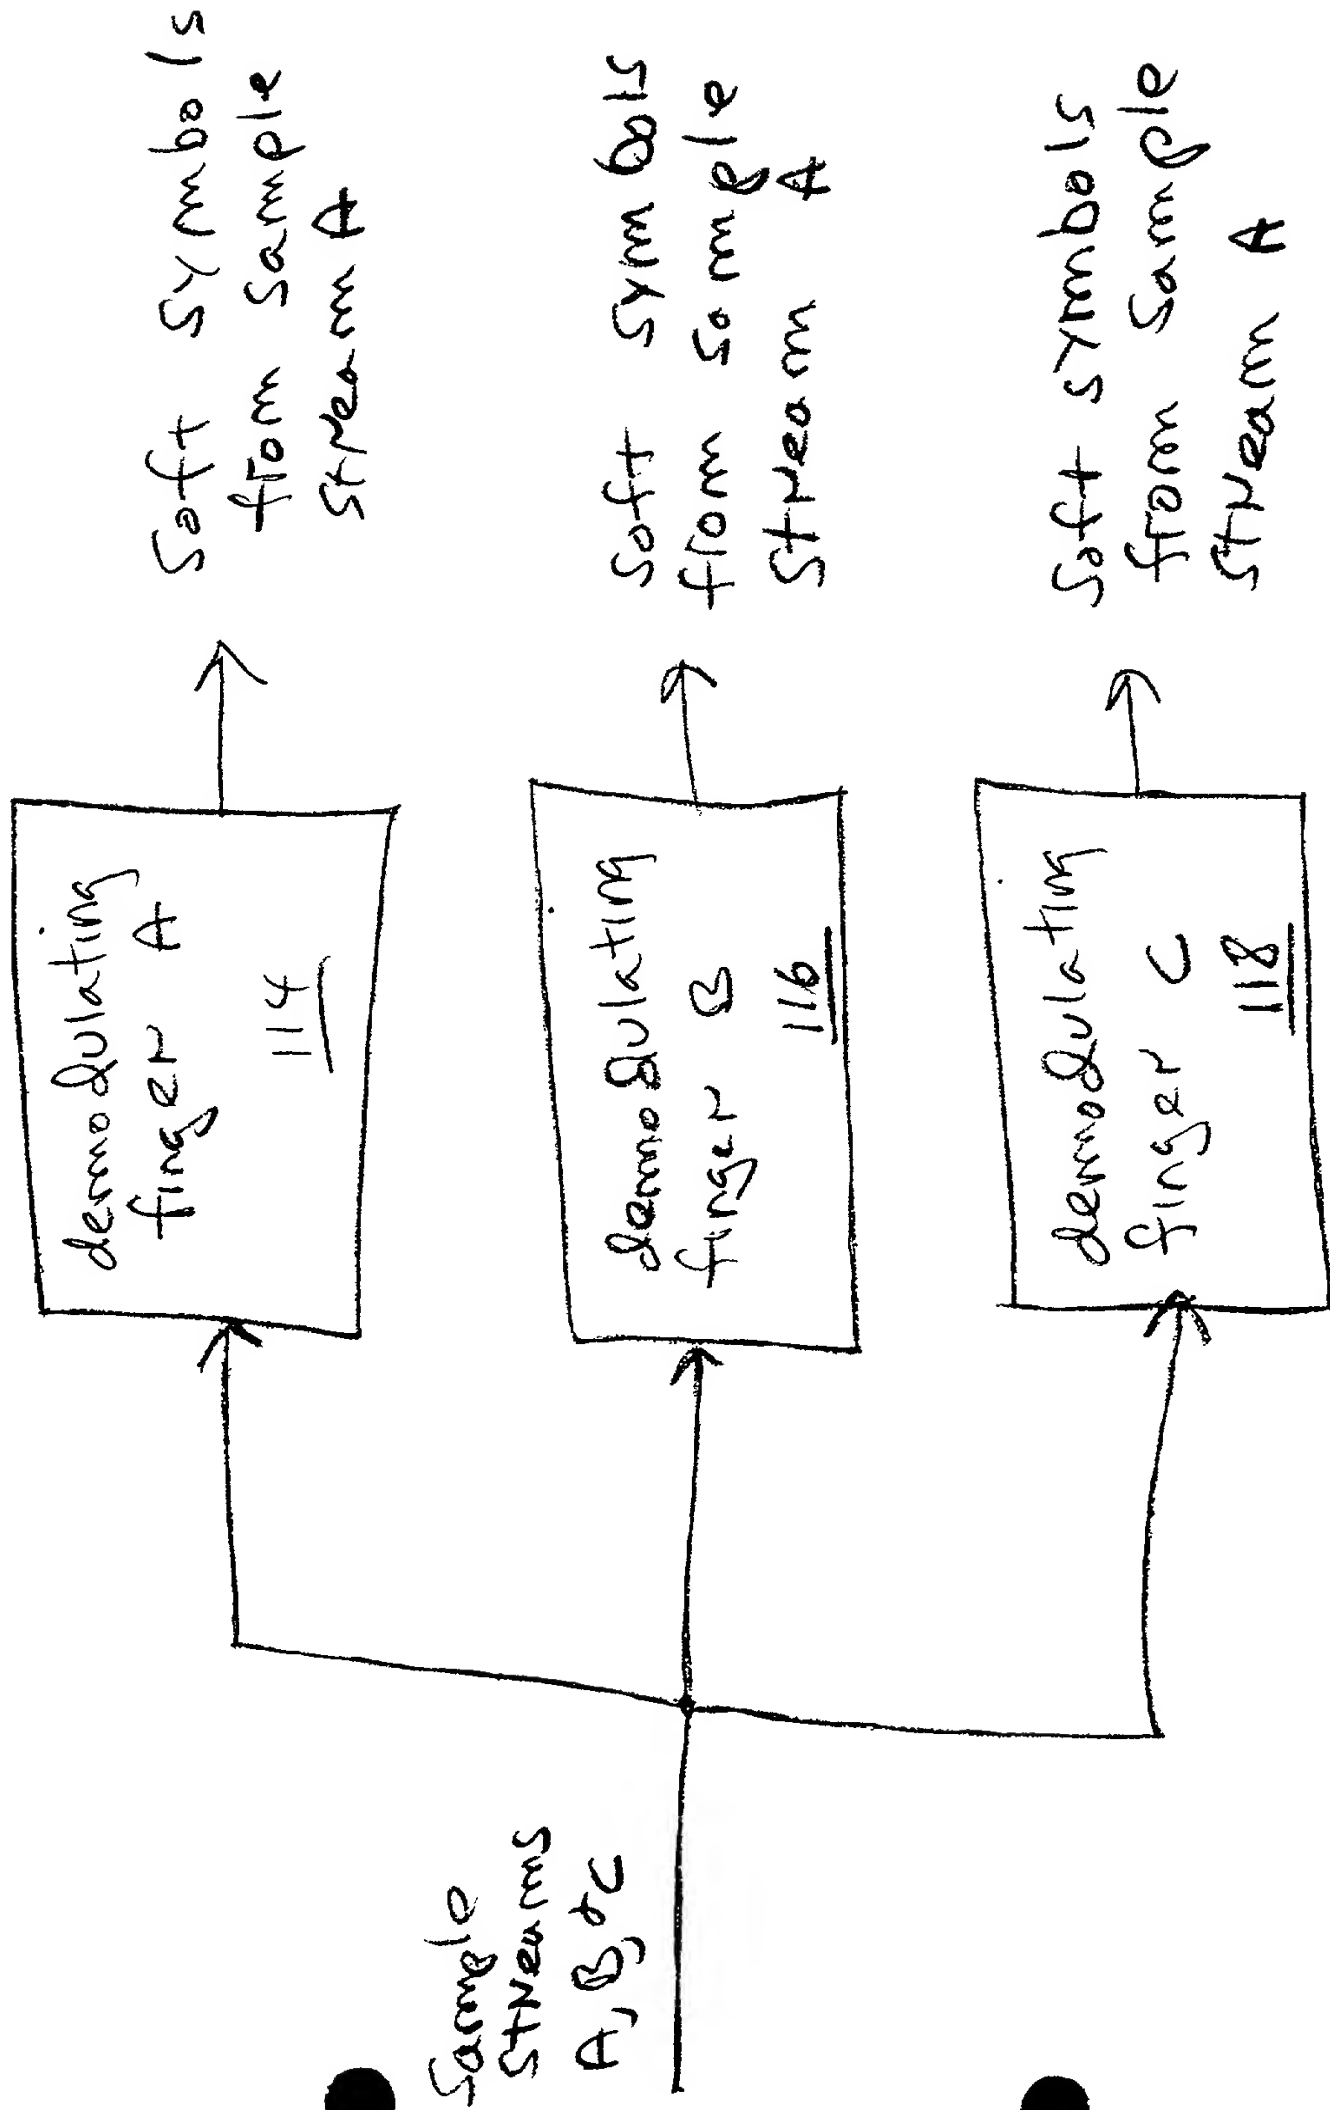


Fig. 8

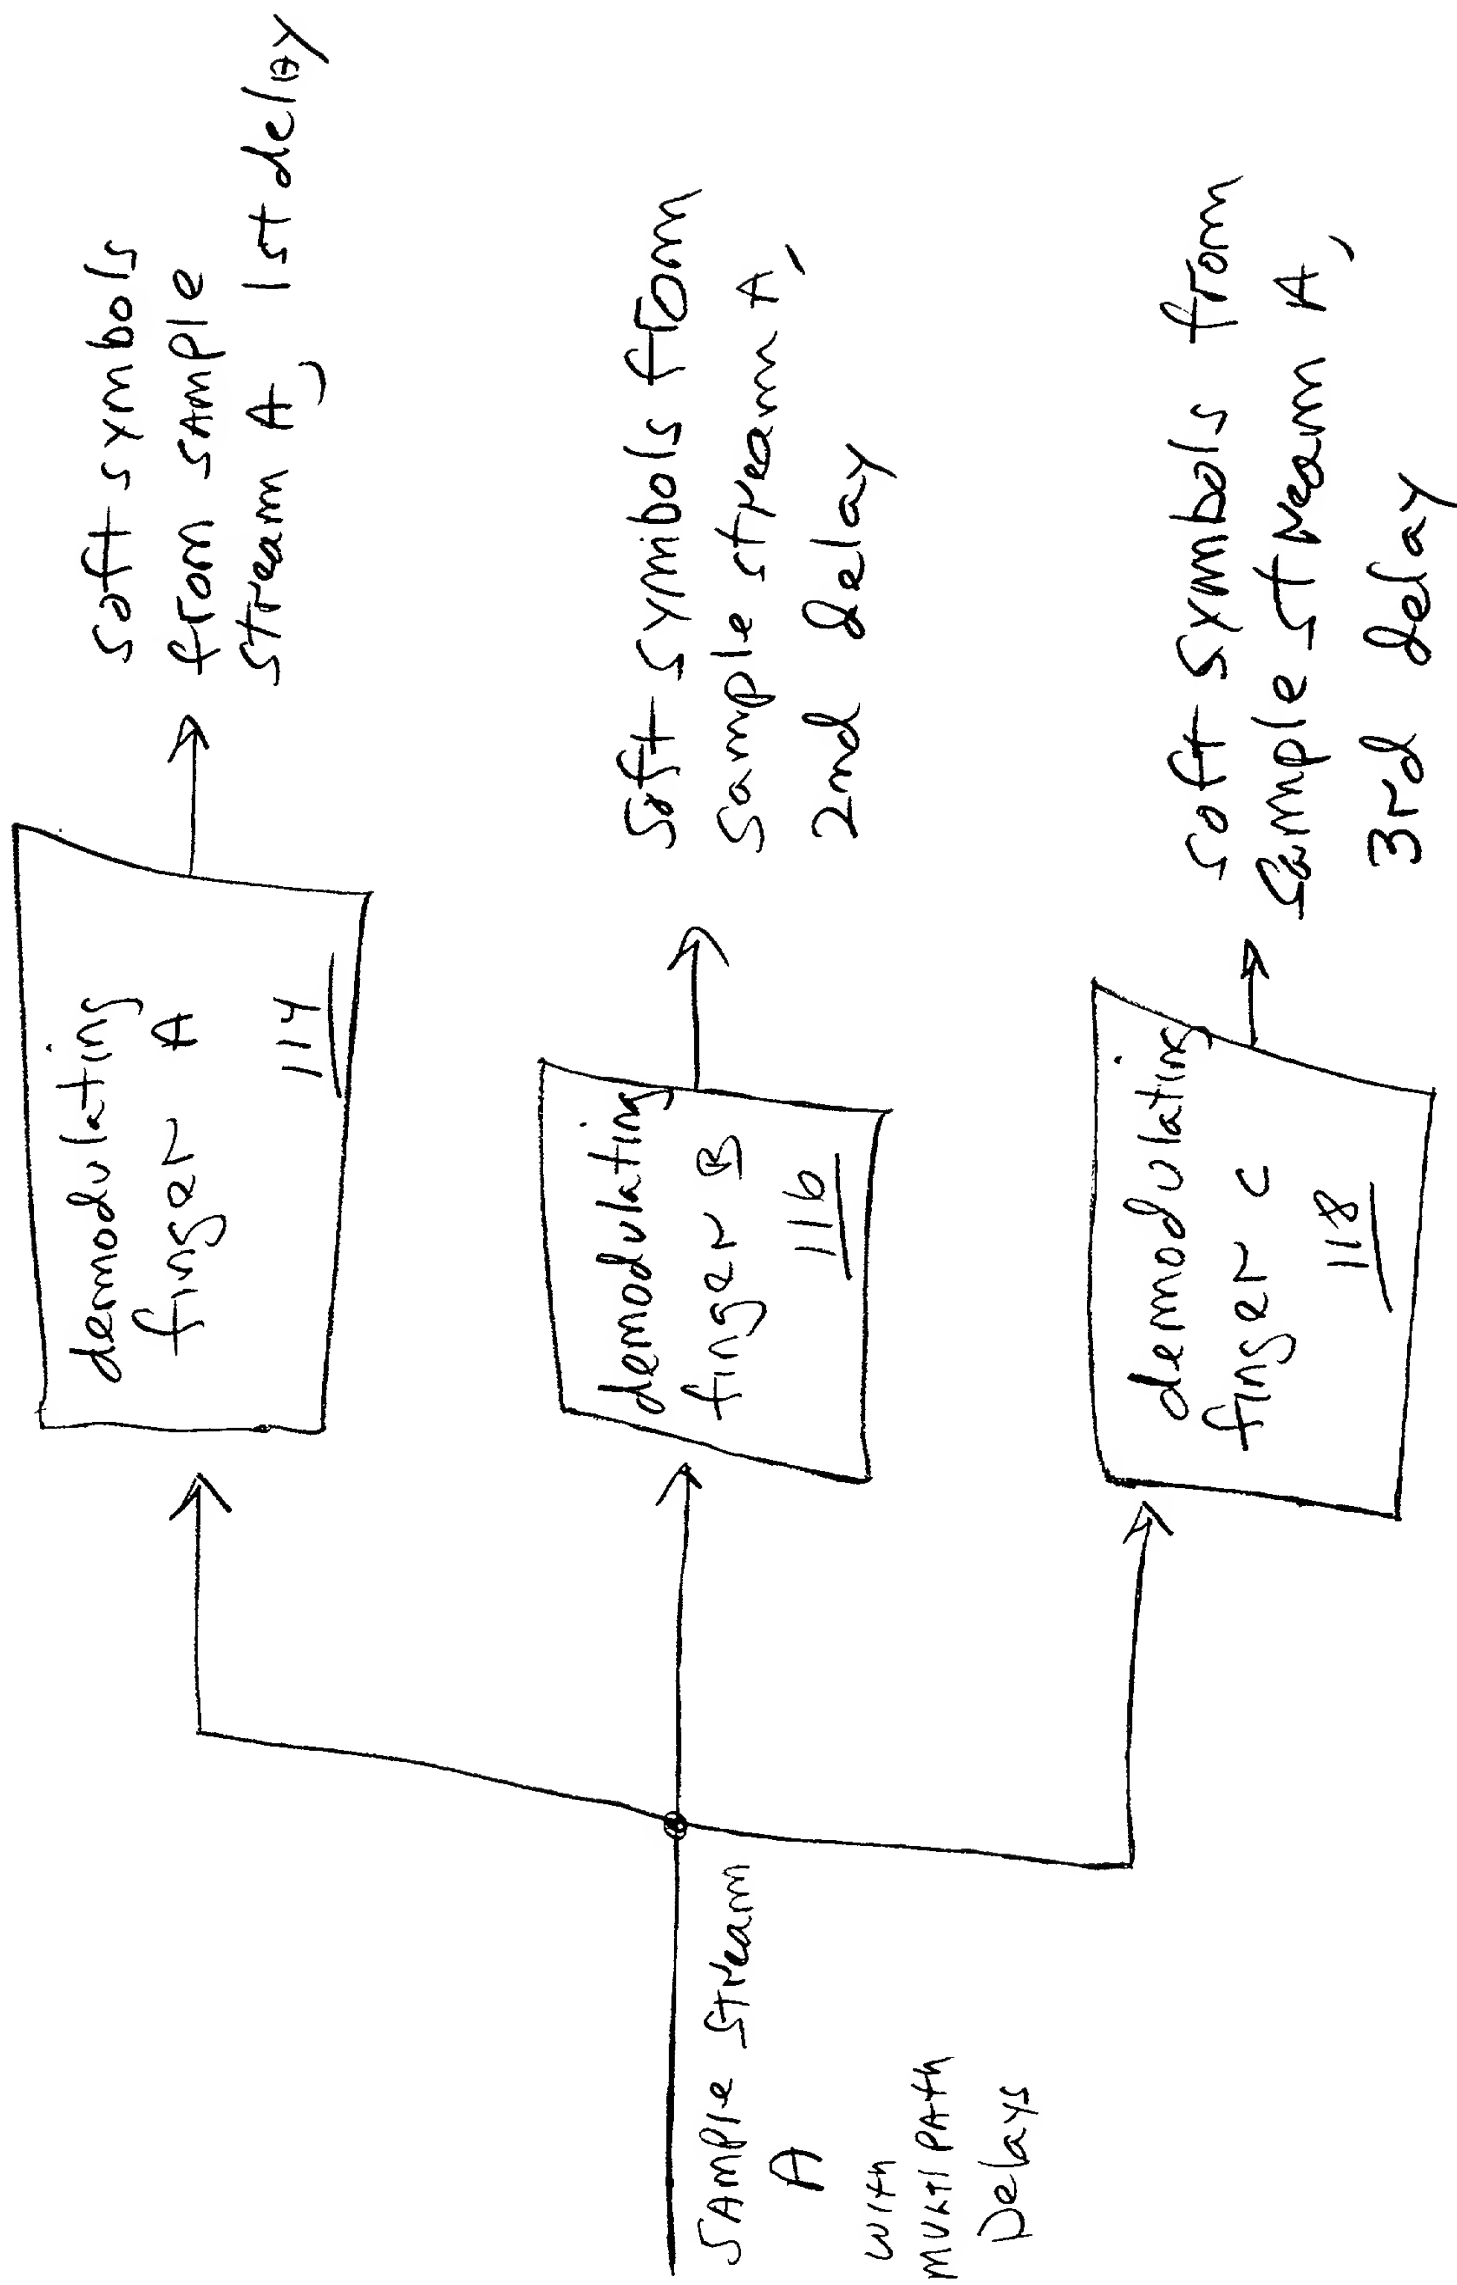


Fig. 9

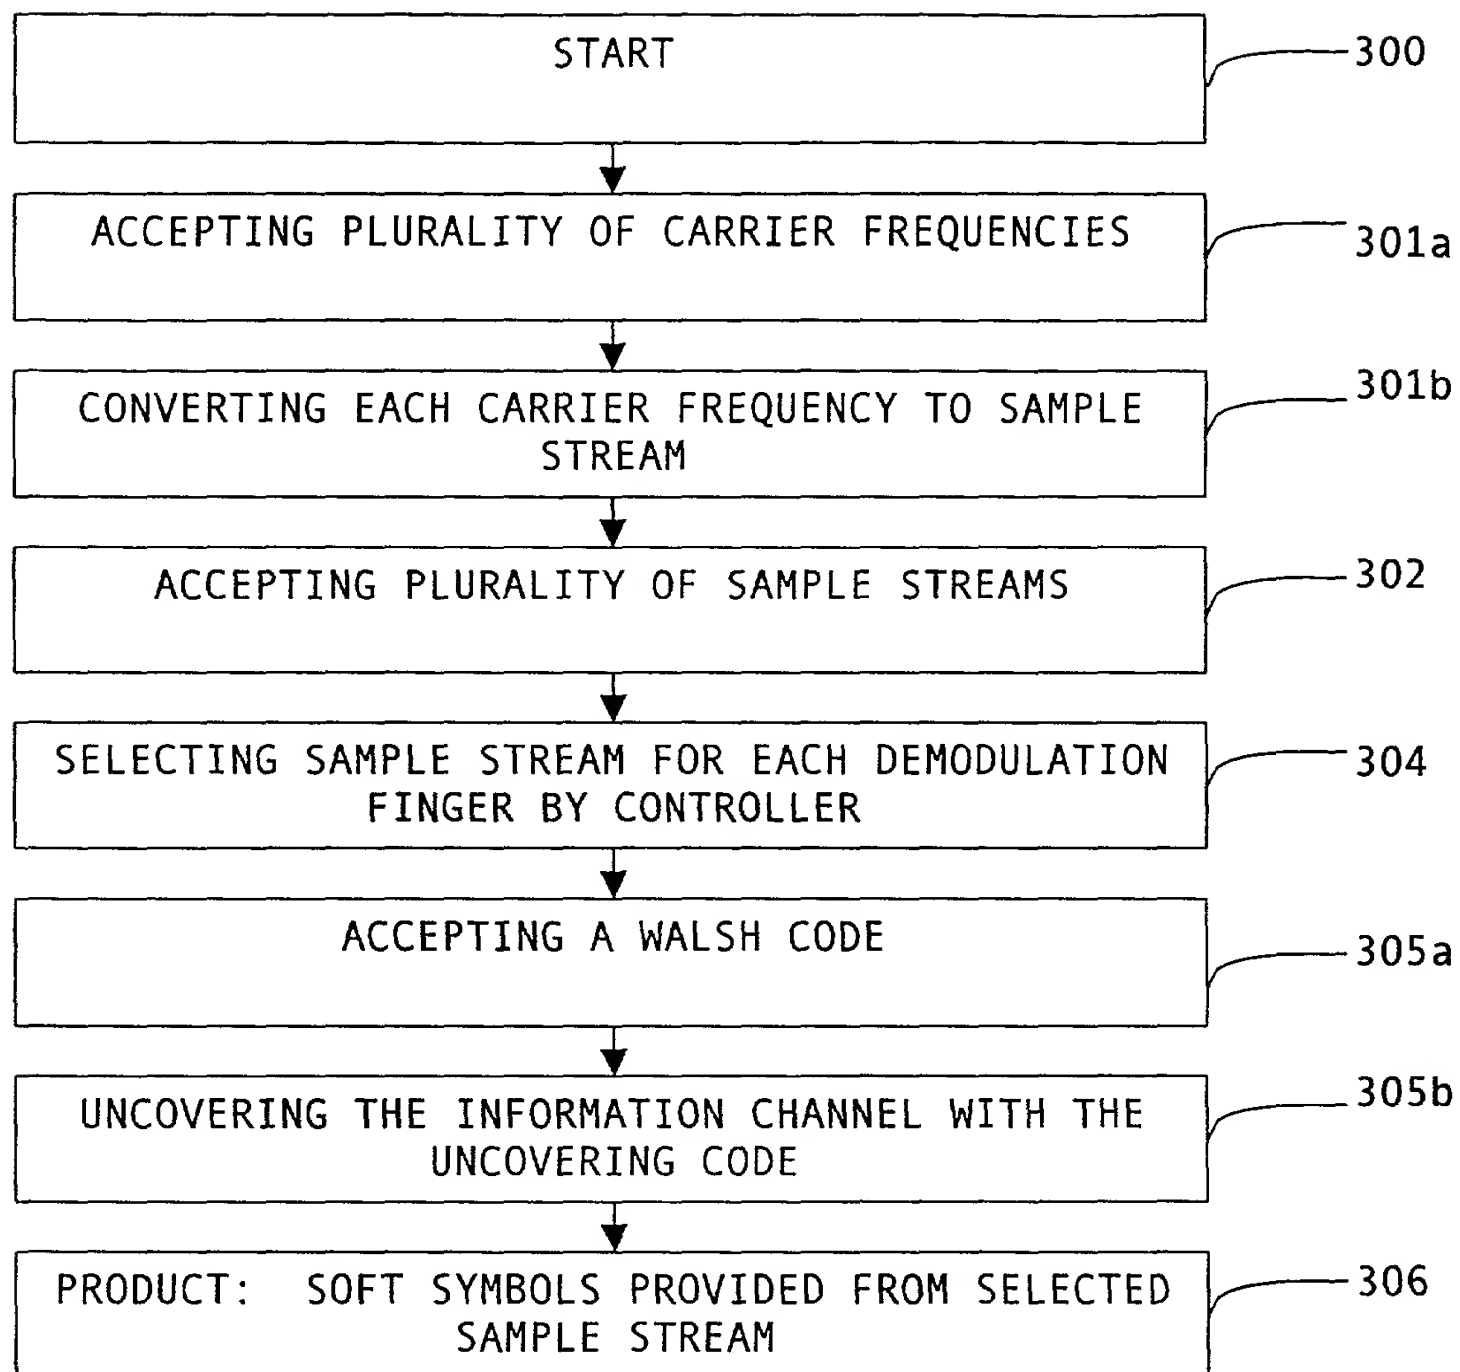


FIG. 10

ATTORNEY'S DOCKET NO.


TI-31698

APPLICATION FOR UNITED STATES PATENT

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor if only one name is listed below, or an original, first and joint inventor if plural inventors are named below, of the subject matter which is claimed and for which a patent is sought on the invention entitled as set forth below, which is described in the attached specification; that I have reviewed and understand the contents of the specification, including the claims, as amended by any amendment specifically referred to in the oath or declaration; that no application for patent or inventor's certificate on this invention has been filed by me or my legal representatives or assigns in any country foreign to the United States of America; and that I acknowledge my duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, section 1.56.

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

TITLE OF INVENTION: SYSTEM AND METHOD FOR SELECTING SAMPLE STREAMS IN DIRECT SEQUENCE SPREAD SPECTRUM COMMUNICATIONS		
POWER OF ATTORNEY: I HEREBY APPOINT THE FOLLOWING ATTORNEYS TO PROSECUTE THIS APPLICATION AND TRANSACT ALL BUSINESS IN THE PATENT AND TRADEMARK OFFICE CONNECTED THEREWITH: Ronald O. Neerings, Reg. No. 34,227 Wade J. Brady, III, Reg. No. 32,080 Jay Cantor, Reg. No. 19,906 Robby T. Holland, Reg. No. 33,304 William B. Kempler, Reg. No. 28,228 Frederick J. Telecky, Jr., Reg. No. 29,979		
SEND CORRESPONDENCE TO: RONALD O. NEERINGS Texas Instruments Incorporated P. O. Box 655474, M.S. 3999 Dallas, Texas 75265		DIRECT TELEPHONE CALLS TO: Ronald O. Neerings (972) 917-5299
NAME OF INVENTOR: (1) John G. McDonough	NAME OF INVENTOR: (2)	NAME OF INVENTOR: (3)
RESIDENCE (City and State Only) La Jolla, California	RESIDENCE (City and State Only)	RESIDENCE (City and State Only)
POST OFFICE ADDRESS 7873 Via Capri La Jolla, CA 92037	POST OFFICE ADDRESS	POST OFFICE ADDRESS
COUNTRY OF CITIZENSHIP: US	COUNTRY OF CITIZENSHIP:	COUNTRY OF CITIZENSHIP:
SIGNATURE OF INVENTOR: 	SIGNATURE OF INVENTOR:	SIGNATURE OF INVENTOR:
DATE: 10/5/00	DATE:	DATE: